# RNAV (GPS) RWY 35R

ABILENE RGNL (ABI)

| WAAS CH 97517 W35A | APP CRS 355° | Rwy Ldg 7198 TDZE 1776 Apt Elev 1791 |
|---|---|---|

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 45°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats to RVR 6000, and LNAV Cats C/D/E to 1⅜ SM.
** RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR

MISSED APPROACH: Climb to 4000 direct GOFDO and hold, continue climb-in-hold to 4000.

| ATIS | ABILENE APP CON | ABILENE TOWER | GND CON |
|---|---|---|---|
| 118.25 | 125.0 338.3 (E) 127.2 282.3 (W) | 120.1 257.8 | 121.7 348.6 |

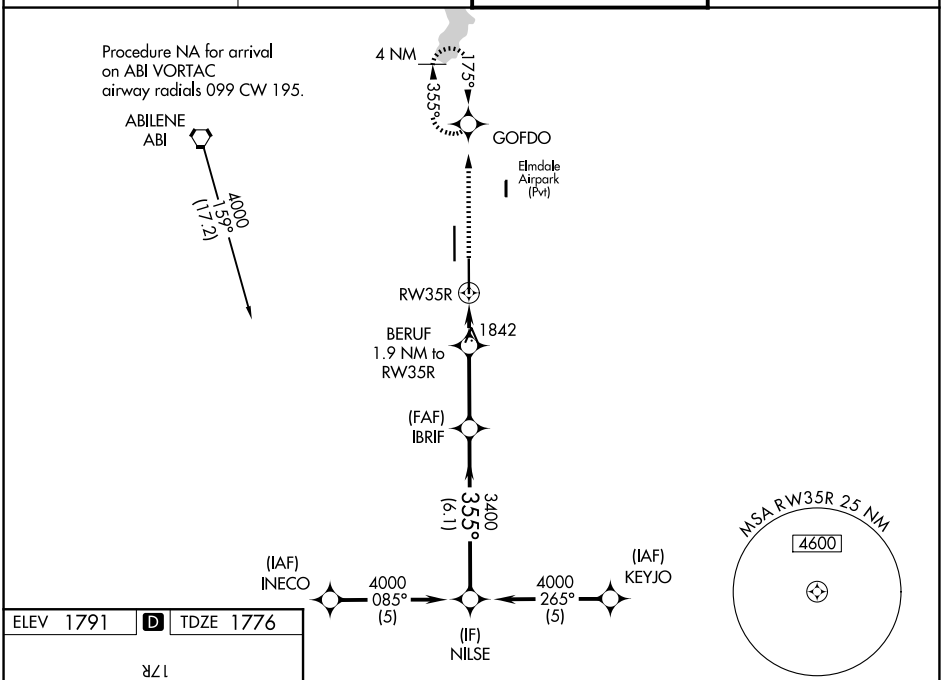


ELEV 1791 D TDZE 1776

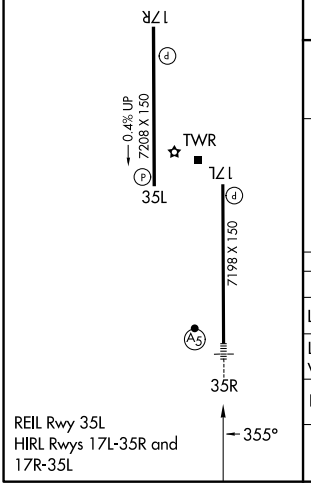


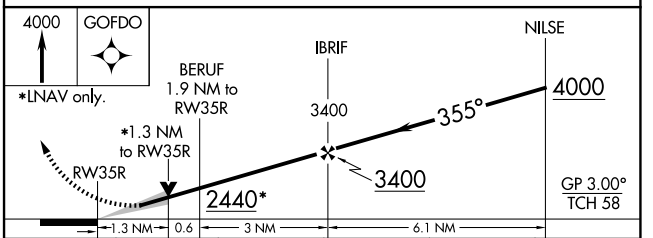


| CATEGORY | A | B | C | D | E |
|---|---|---|---|---|---|
| LPV DA** | 1976/24 200 (200-½) | | | | |
| LNAV/VNAV DA | 2189/40 413 (400-¾) | | | | 2189/50 413 (400-1) |
| LNAV MDA | 2260/24 484 (500-½) | | 2260/50 484 (500-1) | | |
| CIRCLING | 2300-1 509 (600-1) | 2320-1 529 (600-1) | 2420-1¾ 629 (700-1¾) | 2460-2 669 (700-2) | 2620-3 829 (900-3) |



SC-2, 11 JUN 2026 to 09 JUL 2026
SC-2, 11 JUN 2026 to 09 JUL 2026