

RNAV (RNP) Z RWY 26L

EL PASO INTL (ELP)


| | | |
|------------------------|-----------------------------|---|
| APP CRS 265° | Rwy Ldg TDZE Apt Elev | 9025 3962 3962 |
|------------------------|-----------------------------|---|

ASR For uncompensated Baro-VNAV systems, procedure NA below -8°C (18°F) or above 50°C (122°F). For inop MALSRS, increase RNP 0.30 visibility all Cats to 1 mile. GPS required.



MISSED APPROACH: Climb to 4400, then climbing right turn to 7500 direct FABAN and hold.


| | | | |
|------------------------------|---|---------------------------------------|-------------------------------|
| D-ATIS 120.0 254.3 | EL PASO APP CON 124.25 298.85 | EL PASO TOWER 118.3 239.275 | GND CON 121.9 348.6 |
|------------------------------|---|---------------------------------------|-------------------------------|

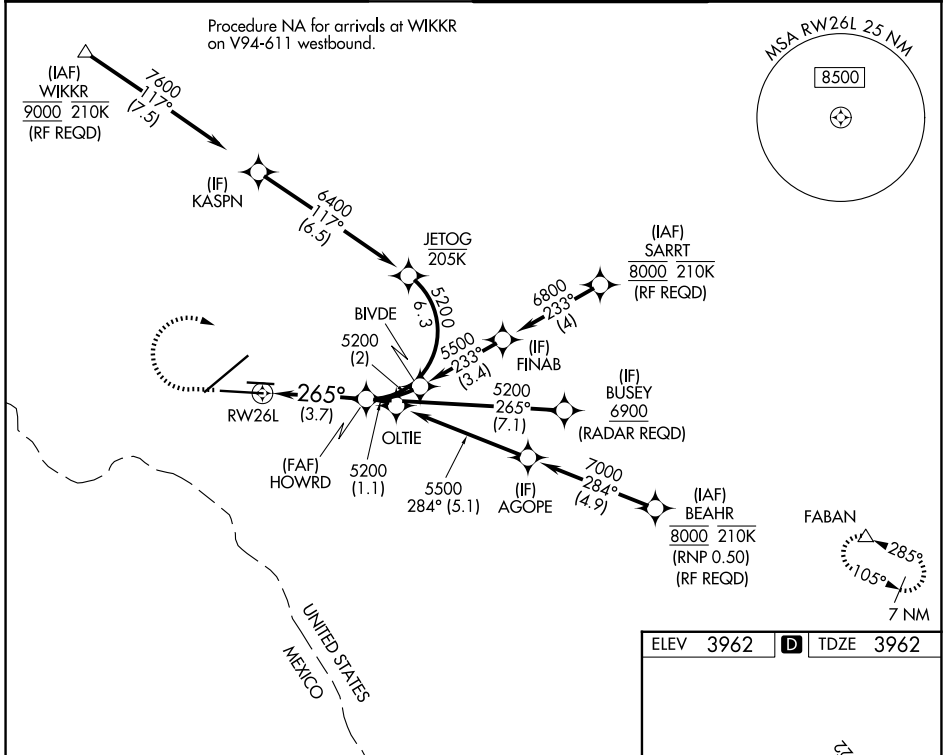

SC-3, 11 JUN 2026 to 09 JUL 2026



SC-3, 11 JUN 2026 to 09 JUL 2026

| | |
|-----------|--------------------|
| ELEV 3962 | D TDZE 3962 |
|-----------|--------------------|



VGSI and glidepath not coincident (VGSI Angle 3.00/TCH 75).

See planview for multiple IF locations.

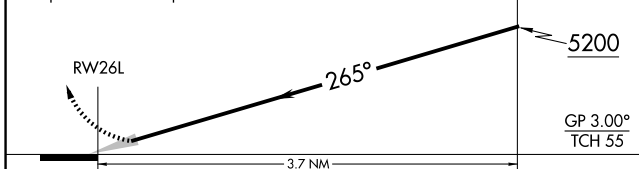

| CATEGORY | A | B | C | D |
|-------------|---|----------|---------------|---|
| RNP 0.30 DA | | 4275-1/2 | 313 (400-1/2) | |

AUTHORIZATION REQUIRED

MIRL Rwy 8L-26R
REIL Rwys 4 and 8R
HIRL Rwys 4-22 and 8R-26L