

WAAS CH 56201 W 27B	APP CRS 274°	Rwy Ldg 9482 TDZE 26 Apt Elev 33
---	------------------------	---

RNAV (GPS) RWY 27L


MELBOURNE ORLANDO INTL (MLB)

RNP APCH - GPS.



▼ For uncompensated Baro-VNAV systems, LNAV/VNAV
▲ NA below 2°C or above 54°C.

MISSED APPROACH: Climb to 2000 direct SUROY and hold.

ATIS 132.55	ORLANDO APP CON 126.025 281.425	MELBOURNE TOWER ★ 118.2 (CTAF) 257.8	GND CON 121.9	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

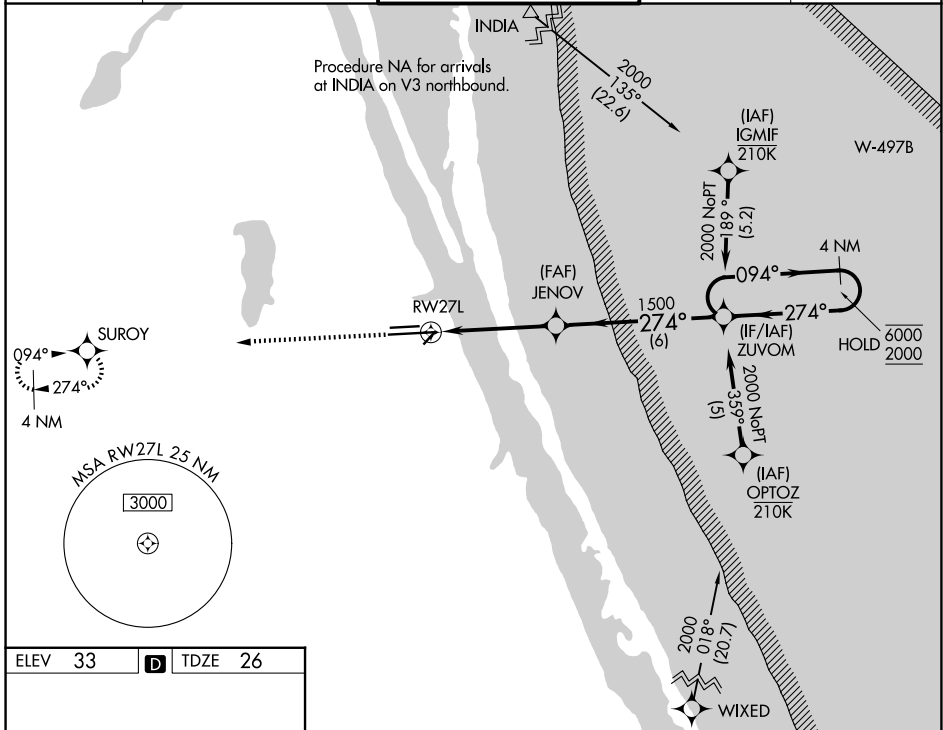

ELEV 33	D	TDZE 26
---------	----------	---------

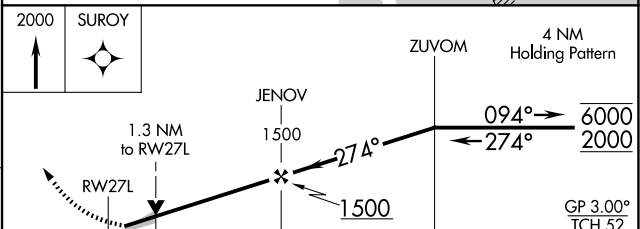

CATEGORY	A	B	C	D
LPV DA		226- ³ / ₄	200 (200- ³ / ₄)	
LNAV/DA		318- ⁷ / ₈	292 (300- ⁷ / ₈)	
LNAV MDA	500-1	474 (500-1)	500- ¹ / ₈	474 (500- ¹ / ₈)
CIRCLING	500-1 467 (500-1)	560-1 527 (600-1)	680- ¹ / ₄ 647 (700- ¹ / ₄)	880- ² / ₄ 847 (900- ² / ₄)

REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwys 5-23 and 9L-27R
TDZ/CL Rwy 9R