


WAAS CH <b>70546</b> <b>W16B</b>	APP CRS <b>164°</b>	Rwy Ldg <b>12002</b> TDZE <b>4231</b> Apt Elev <b>4231</b>
--	------------------------	--

# RNAV (GPS) Y RWY 16L

SALT LAKE CITY INTL (SLC)


RNP APCH - GPS.	ALSF-2	MISSED APPROACH: Climb to 10000 direct RULFO and on track 167° to FFU VORTAC and hold.
<p>▼ LNAV procedure NA during simultaneous operations. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 49°C. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV Cat A visibility to RVR 4500, increase Cats C/D visibility to RVR 5500, increase Cat E visibility to 6000, and increase LNAV Cat E visibility to 1½ SM.</p>		

D-ATIS <b>124.75 125.625</b>	SALT LAKE CITY APP CON <b>125.7 284.6</b>	SALT LAKE CITY TOWER <b>119.05 257.8</b>	GND CON <b>123.775 348.6</b>
---------------------------------	--	---	---------------------------------

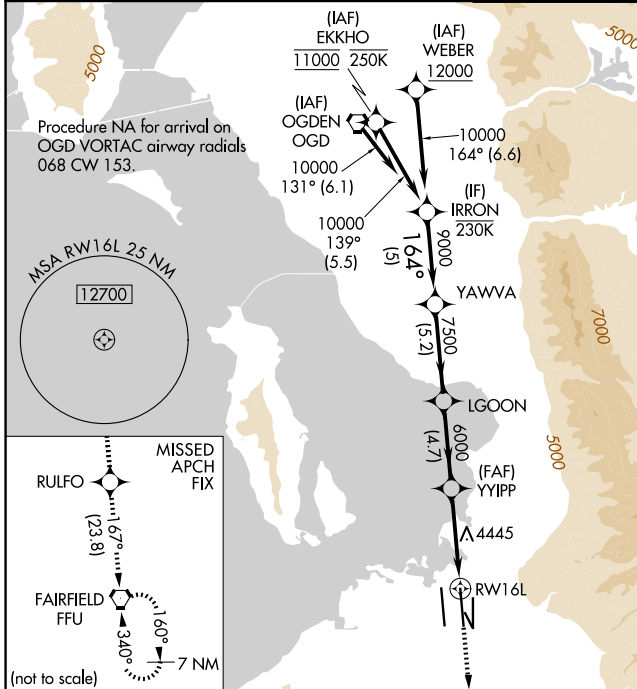

IRRON	YAWWA	LGOON	YYIPP	RULFO	FFU
10000	9000	7500	6000	tr 167°	
VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).					
GP 3.00° TCH 55					
5 NM		5.2 NM		4.7 NM	

CATEGORY	A	B	C	D	E
LPV DA	4431/18 200 (200-½)				
LNAV/VNAV DA	4537/24 306 (400-½)	4559/26 328 (400-½)	4574/30 343 (400-¾)	4593/35 362 (400-¾)	4634/40 403 (500-¾)
LNAV MDA	4760/24	529 (600-½)	4760/55 529 (600-1)		

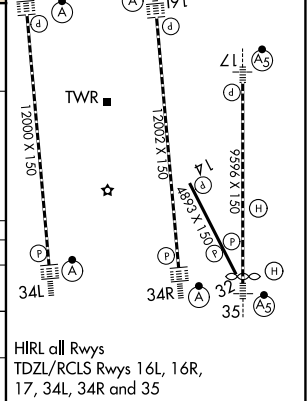

SW-4, 11 JUN 2026 to 09 JUL 2026

SW-4, 11 JUN 2026 to 09 JUL 2026