WAAS	APP CRS	Rwy Ldg	9596
CH 82338	169°	TDZE	4222
W17A		Apt Elev	4231

RNAV (GPS) Y RWY 17

SALT LAKE CITY INTL (SLC)

RNP APCH - GPS.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 49°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 5500, and LNAV Cat C/D/E visibility to 1⅜ SM.

MALSR

MISSED APPROACH: Climb to 4700 then climb to 10000 direct FFU VORTAC and hold.

D-ATIS	SALT LAKE CITY APP CON	SALT LAKE CITY TOWER	GND CON
124.75 125.625	125.7 284.6	118.3 257.8	123.775 348.6

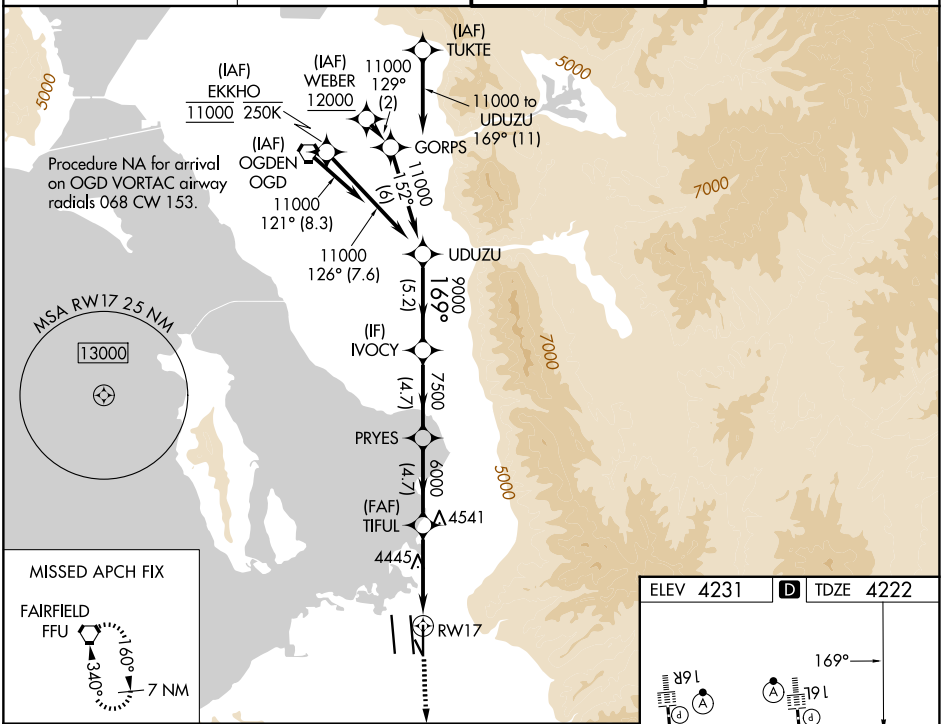

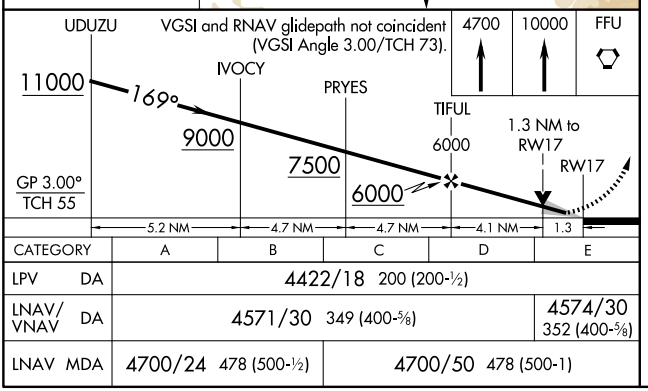

CATEGORY	A	B	C	D	E
LPV DA	4422/18 200 (200-½)				
LNAV/VNAV DA	4571/30 349 (400-⅝)				4574/30 352 (400-⅝)
LNAV MDA	4700/24 478 (500-½)		4700/50 478 (500-1)		

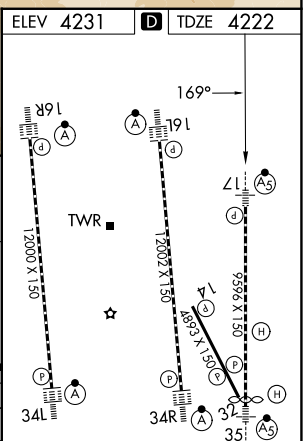

SW-4, 11 JUN 2026 to 09 JUL 2026
SW-4, 11 JUN 2026 to 09 JUL 2026