

| | | | |
|---------------------------|------------------------|-----------------------------|---|
| LOC I-FSD 109.9 | APP CRS 030° | Rwy Ldg TDZE Apt Elev | 8999 1424 1430 |
|---------------------------|------------------------|-----------------------------|---|

ILS or LOC RWY 3

JOE FOSS FLD (FSD)


ADF or RADAR required.

MALSR
 MISSED APPROACH: Climb to 3400 then left turn direct FSD VORTAC and hold.

ASR
 For inop ALS, increase S-LOC 3 Cats C/D visibility to 1 3/4 SM, and S-LOC 3 MAREY fix minimums Cats C/D to 1 3/4 SM.

-30°C


| | | | | |
|----------------------|--|---|-------------------------------|-------------------------|
| ATIS 126.6 | SIoux FALLS APP CON* 125.8 284.725 | SIoux FALLS TOWER* 118.3 (CTAF) 257.8 | GND CON 121.9 348.6 | UNICOM 122.95 |
|----------------------|--|---|-------------------------------|-------------------------|

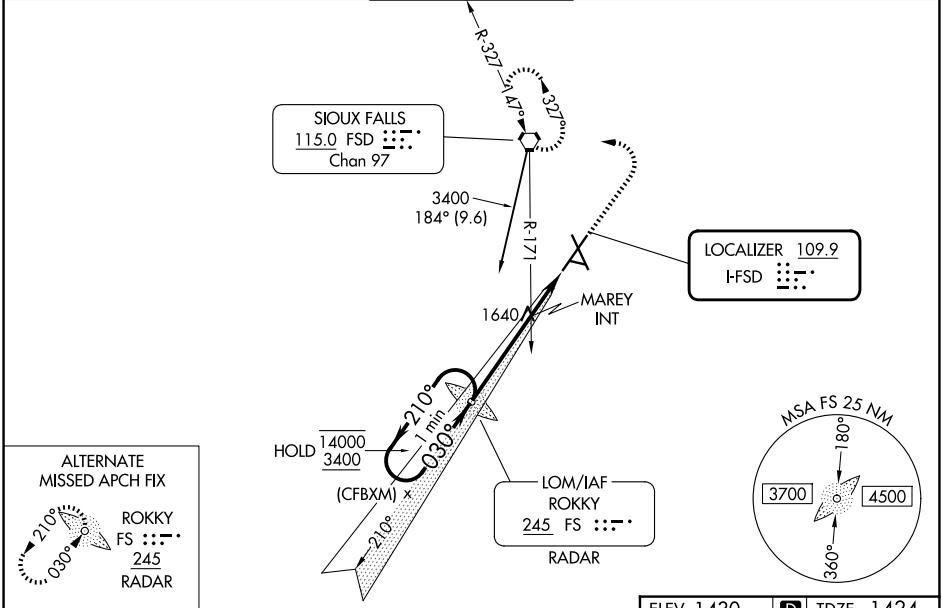


ALTERNATE MISSED APCH FIX

ROKKY
 FS :::-
245
 RADAR

HOLD
 14000
 3400
 210°
 030°
 (CFBXM)

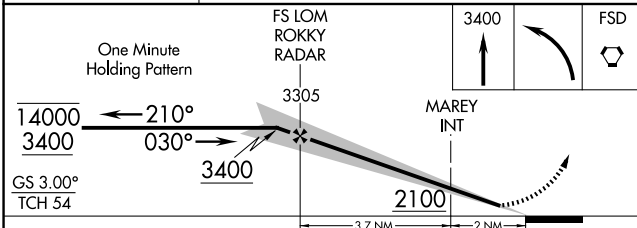

| CATEGORY | A | B | C | D |
|--|-----------------------|---------------|-----------------|-----------------|
| S-ILS 3 | 1674/24 250 (300-1/2) | | | |
| S-LOC 3 | 2100/24 | 676 (700-1/2) | 2100-1 1/2 | 676 (700-1 1/2) |
| CIRCLING | 2100-1 | 670 (700-1) | 2100-1 7/8 | 2200-2 1/2 |
| MAREY FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED) | | | | |
| S-LOC 3 | 1940/24 | 516 (600-1/2) | 1940/55 | 516 (600-1) |
| CIRCLING | 1980-1 | 550 (600-1) | 2060-1 3/4 | 2200-2 1/2 |
| | | | 630 (700-1 3/4) | 770 (800-2 1/2) |

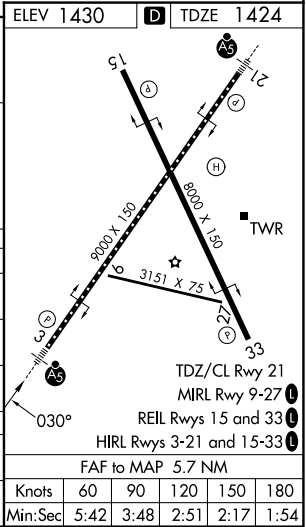

NC-1, 11 JUN 2026 to 09 JUL 2026

NC-1, 11 JUN 2026 to 09 JUL 2026