ALTUS, OKLAHOMA

RNAV (RNP) X RWY 36L

ALTUS AFB (KLTS)

APCH CRS	Rwy ldg	13,440
355°	TDZE	1354
	Arpt Elev	1382

(USAF)

RNP AR APCH - RF

* When ALS inop, increase RVR to 45, vis to 7/8 mile.
** When ALS inop, increase RVR to 55, vis to 1 mile.

ALSF-1

MISSED APPROACH: Climb to 4000 on track 355° to MRTHA and hold.

ATIS★	APP CON	TOWER★	GND CON
109.8 273.5	125.1 353.7	119.65 254.4	121.85 275.8

For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 54°C.

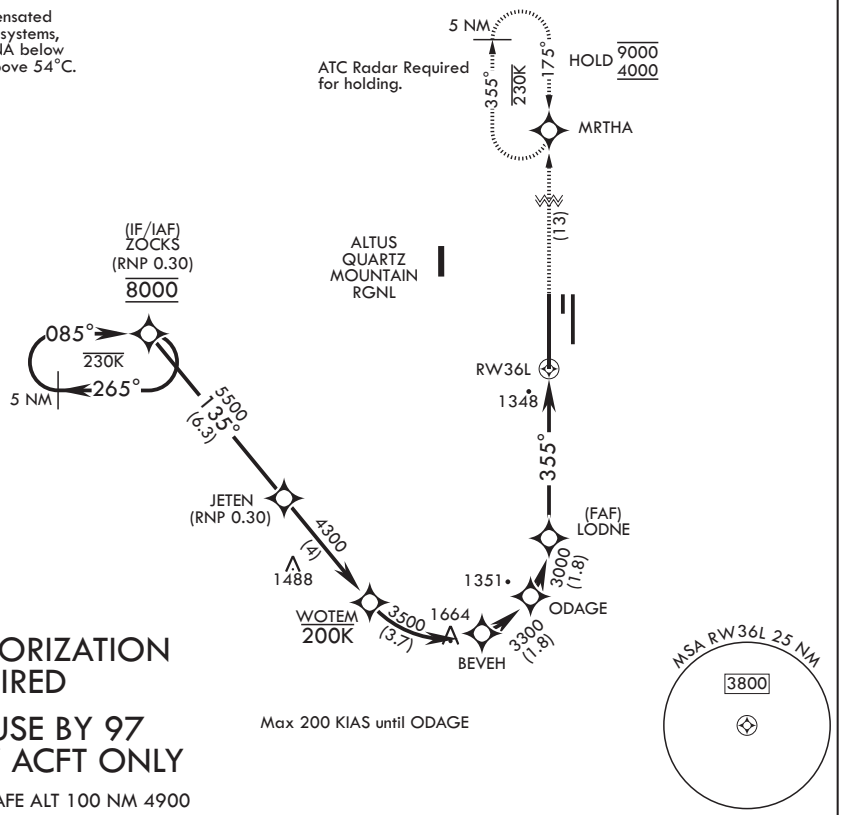

AUTHORIZATION REQUIRED

FOR USE BY 97 AMW ACFT ONLY

EMERG SAFE ALT 100 NM 4900

Max 200 KIAS until ODAGE

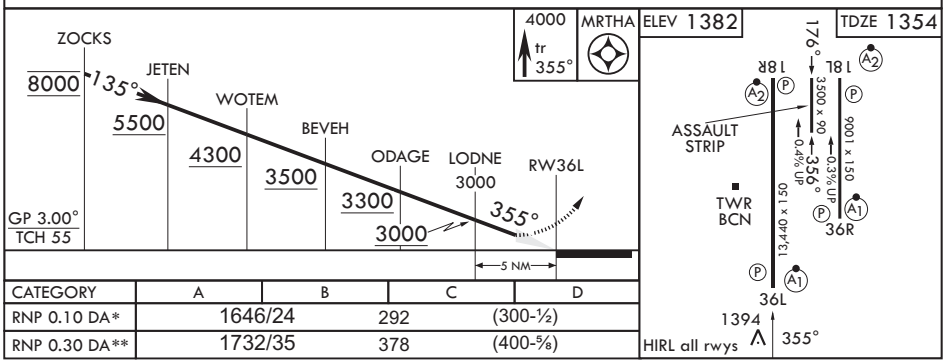

CATEGORY	A	B	C	D
RNP 0.10 DA*	1646/24	292	(300-½)	
RNP 0.30 DA**	1732/35	378	(400-⅝)	