

WAAS CH <b>86232</b> <b>W13A</b>	APP CRS <b>126°</b>	Rwy Ldg <b>5601</b> TDZE <b>593</b> Apt Elev <b>595</b>
--	------------------------	---

# RNAV (GPS) RWY 13

SAN MARCOS RGNL (HYI)

RNP APCH-GPS.


**⚠** Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats.  
**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.6°C or above 54°C.  
 For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM.

MALS



MISSED APPROACH:  
Climb to 3000 direct  
HODAL and hold.



ATIS <b>120.825</b>	AUSTIN APP CON <b>119.0 370.85</b>	SAN MARCOS TOWER★ <b>126.825</b> (CTAF) <b>0</b>	GND CON <b>120.125</b>
------------------------	---------------------------------------	---	---------------------------

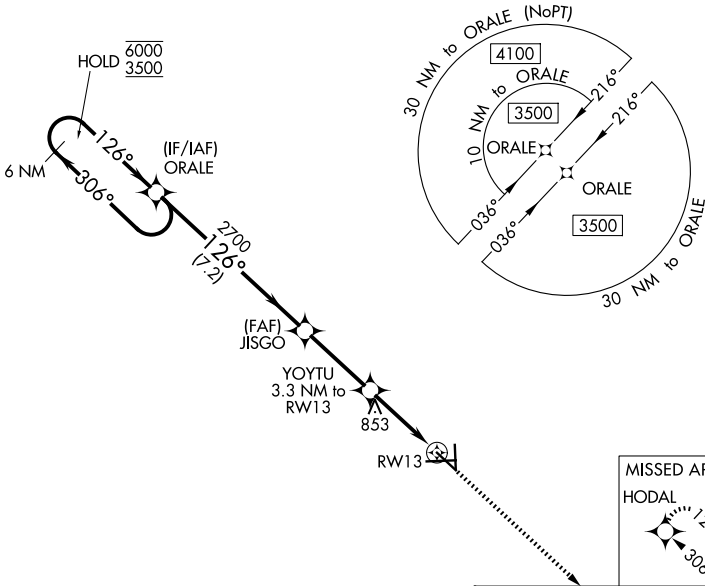

SC-3, 11 JUN 2026 to 09 JUL 2026

SC-3, 11 JUN 2026 to 09 JUL 2026

ELEV 595	TDZE 593
----------	----------

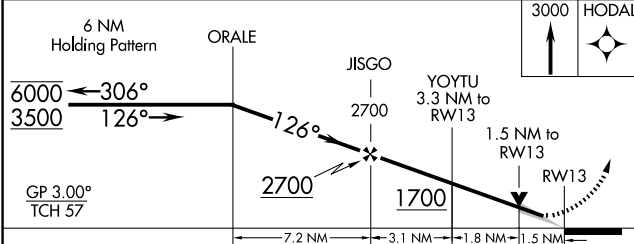

CATEGORY	A	B	C	D	E
LPV DA		793-¾	200 (200-¾)		
LNAV/VNAV DA		946-¾	353 (400-¾)		
LNAV MDA	1120-¾	527 (600-¾)	1120-¼	527 (600-¼)	
CIRCLING	1120-1	525 (600-1)	1240-1¾ 645 (700-1¾)	1320-2¼ 725 (800-2¼)	1340-2¾ 745 (800-2¾)

MIRL RWys 8-26, 13-31, and 17-35 **0**