RNAV (GPS) RWY 21

MID-OHIO VALLEY RGNL (PKB)

WAAS CH 86727 W21A	APP CRS 210°	Rwy Ldg 6780 / TDZE 857 / Apt Elev 859

RNP APCH.

T A Baro-VNAV and VDP NA when using Athens/Albany altimeter setting. Rwy 21 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, procedure NA below -17°C or above 38°C. When local altimeter setting not received, use Athens/Albany altimeter setting: increase LPV DA to 1249 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 1237 feet and visibility all Cats ½ SM; increase all MDAs 100 feet and visibility Cat C/D ½ SM. Circling Rwy 10, 28 NA at night.

MISSED APPROACH: Climb to 3000 direct UNSAW and hold.

ATIS	INDIANAPOLIS CENTER	PARKERSBURG TOWER ★	GND CON	UNICOM
124.35	125.55 317.475	123.7 (CTAF) L 257.8	126.45	122.95

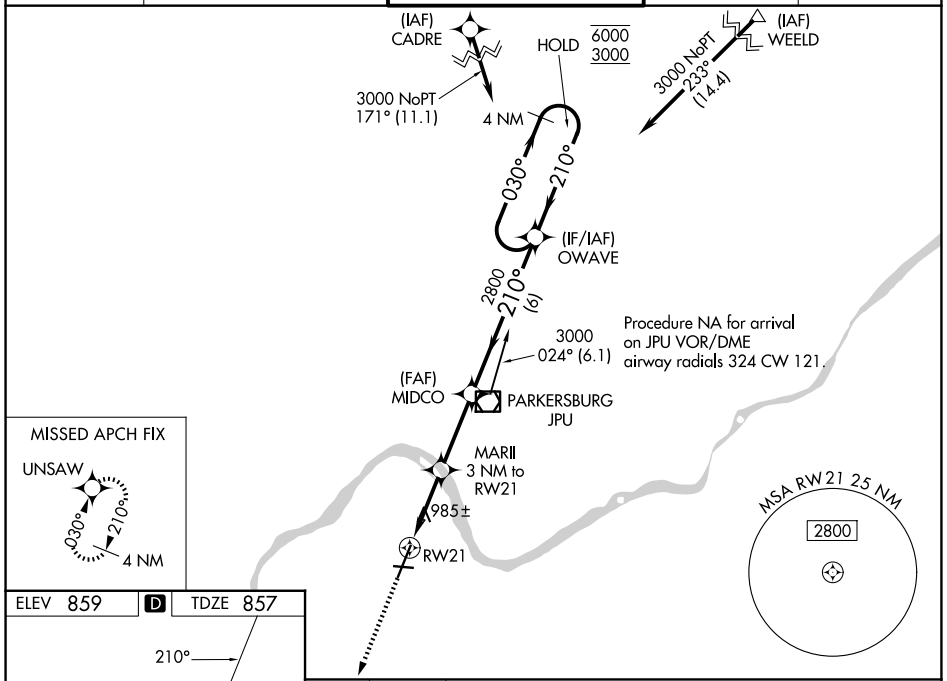

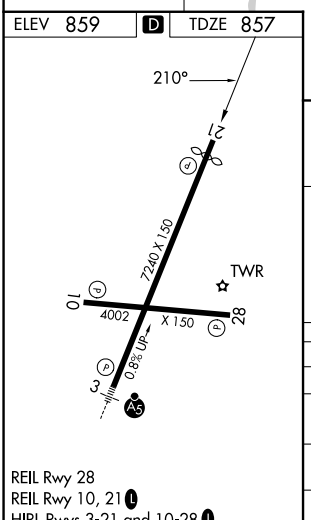

REIL Rwy 28
REIL Rwy 10, 21 L
HIRL Rwys 3-21 and 10-28 L

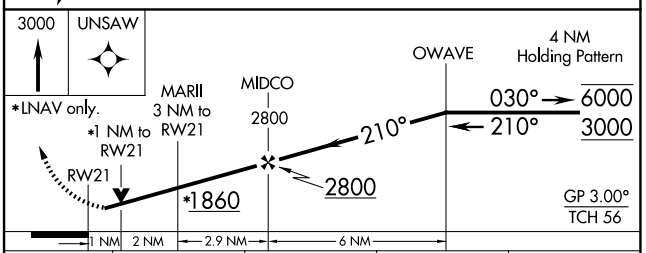

CATEGORY	A	B	C	D
LPV DA	1149-⅞ 292 (300-⅞)			
LNAV/VNAV DA	1137-⅞ 280 (300-⅞)			
LNAV MDA	1240-1 383 (400-1)		1240-1⅛ 383 (400-1⅛)	
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)

NE-4, 11 JUN 2026 to 09 JUL 2026
NE-4, 11 JUN 2026 to 09 JUL 2026