

LOC/DME I-HYA 109.15	APP CRS 246°	Rwy Ldg TDZE Apt Elev	5425 43 54
Chan 28 (Y)			

ILS or LOC RWY 24




CAPE COD GATEWAY (HYA)

RADAR required.

▼ When local altimeter setting not received, use Chatham altimeter setting and increase all DA to 325 feet and increase all MDA 40 feet, increase S-LOC 24 Cats C/D visibility to RVR 6000 and increase Circling Cats C/D visibility ¼ SM. Inop table does not apply to S-ILS 24 all Cats and S-LOC 24 Cats A/B. For inop ALS, increase S-LOC 24 Cats C/D visibility to 1¼ SM. For inop ALS, when using Chatham altimeter setting, increase S-LOC 24 Cats C/D visibility to 1½ SM. Straight-in/Circling Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 24 helicopter visibility reduction below RVR 5000 NA.

MALSF
 MISSED APPROACH:
 Climb to 700 then climbing left turn to 1700 on heading 045° and on ACK VOR/DME R-359 to BOGEY INT/I-HYA 5.1 DME and hold.

ATIS 123.8	BOSTON APP CON 118.2 284.6	HYANNIS TOWER ★ 119.5 (CTAF) 0 257.8	GND CON 118.45	UNICOM 122.95
----------------------	--------------------------------------	---	--------------------------	-------------------------

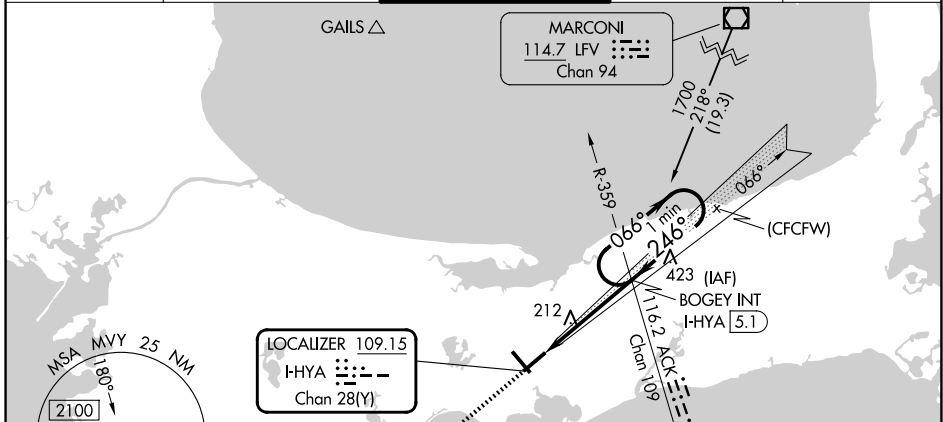

ELEV 54	D	TDZE 43
REIL Rwy 6		
HIRL Rlys 6-24 and 15-33		
FAF to MAP 4.1 NM		
Knots	60	90 120 150 180
Min:Sec	4:06	2:44 2:03 1:38 1:22

700	1700	ACK R-359	BOGEY INT	BOGEY INT I-HYA 5.1	One Minute Holding Pattern
↑	hdg 045°			1400	1700
				1400	066°
					246°
					GS 3.00°
					TCH 50

CATEGORY	A	B	C	D
S-ILS 24		293/50	250 (300-1)	
S-LOC 24		480/50	437 (500-1)	
CIRCLING	560-1 506 (600-1)	580-1 526 (600-1)	860-2¼ 806 (900-2¼)	860-2½ 806 (900-2½)

NE-1, 11 JUN 2026 to 09 JUL 2026

NE-1, 11 JUN 2026 to 09 JUL 2026