

WAAS CH 45799 W06A	APP CRS 066°	Rwy Ldg 5019 TDZE 45 Apt Elev 54
--	------------------------	---

RNAV (GPS) RWY 6


CAPE COD GATEWAY (HYA)

RNP APCH - GPS

▼ Baro-VNAV NA below -15°C. Baro-VNAV NA when using Chatham altimeter setting. When local altimeter setting not received, use Chatham altimeter setting and increase LPV DA to 348 feet; increase LNAV/VNAV DA to 475 feet and increase LNAV/VNAV all Cats visibility 1/8 SM; increase all MDAs 40 feet; LNAV Cats C and D visibility 1/8 SM; Circling Cats C and D visibility 1/4 SM. Circling Rwy 24 at night, operational VGSI required, remain on or above VGSI glidepath until threshold. Rwy 6 helicopter visibility reduction below 3/4 SM NA.


MISSED APPROACH:
Climb to 1700 direct
MECEJ and hold.

ATIS 123.8	BOSTON APP CON 118.2 284.6	HYANNIS TOWER ★ 119.5 (CTAF) 257.8	GND CON 118.45	UNICOM 122.95
----------------------	--------------------------------------	---	--------------------------	-------------------------

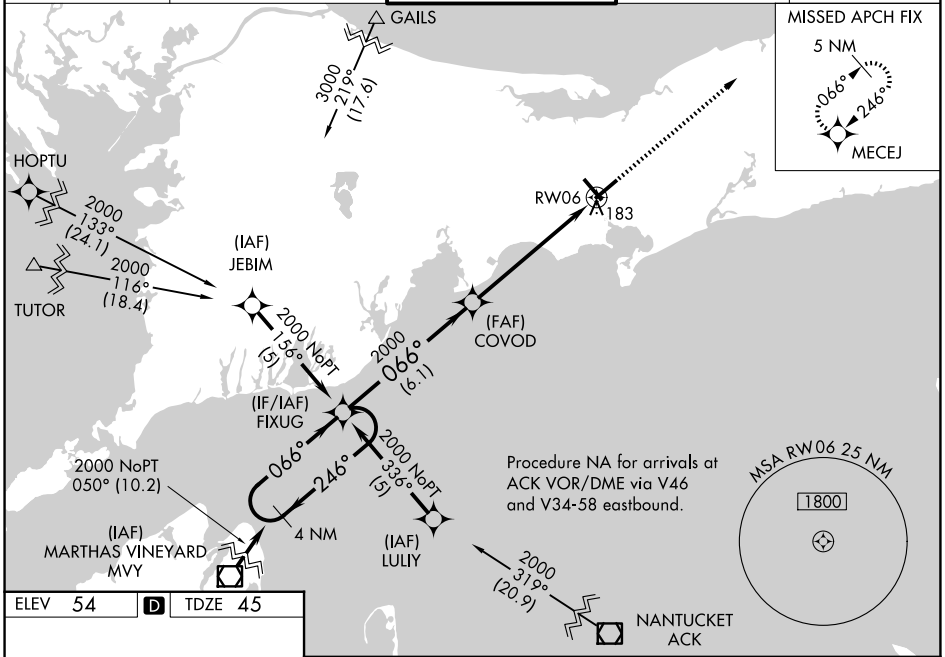

NE-1, 11 JUN 2026 to 09 JUL 2026

NE-1, 11 JUN 2026 to 09 JUL 2026

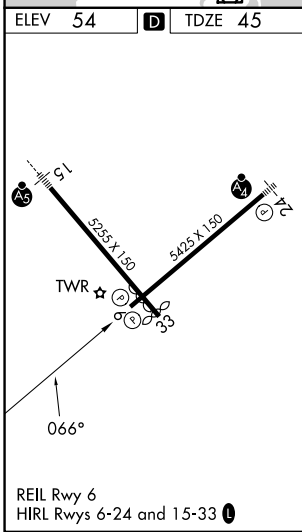

4 NM Holding Pattern	FIXUG		COVOD		1700	MECEJ
	← 246°		→ 066°		↑	✦
GP 3.00° TCH 36	6.1 NM		5.9 NM		RWY 6	
CATEGORY	A		B		C	
LPV DA	316-1		271 (300-1)			
LNAV/VNAV DA	443-1½		398 (400-1½)			
LNAV MDA	480-1	435 (500-1)	480-1¼ 435 (500-1¼)	480-1½ 435 (500-1½)		
CIRCLING	560-1 506 (600-1)	580-1 526 (600-1)	860-2¼ 806 (900-2¼)	860-2½ 806 (900-2½)		