

WAAS CH <b>53417</b> <b>W35A</b>	APP CRS <b>353°</b>	Rwy Idg TDZE <b>1561</b> Apt Elev <b>1563</b>
--	------------------------	---



# RNAV (GPS) RWY 35

HOBART RGNL (HBR)


**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (113°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Altus/Quartz Mountain Rgnl altimeter setting and increase LPV DA to 1882 feet and visibility all Cats ¼ SM; increase LNAV/VNAV DA to 2020 feet and visibility all Cats ¼ SM; increase all MDAs 80 feet and Circling Cat C visibility ¼ SM. Baro-VNAV NA when using Altus/Quartz Mountain Rgnl altimeter setting. VDP NA with Altus/Quartz Mountain Rgnl altimeter setting.

MISSED APPROACH: Climb to 3400 direct BIPGE and hold.

ASOS <b>133.325</b>	ALTUS APP CON★ <b>125.1 353.7</b>	UNICOM <b>122.8</b> (CTAF)
------------------------	--------------------------------------	-------------------------------

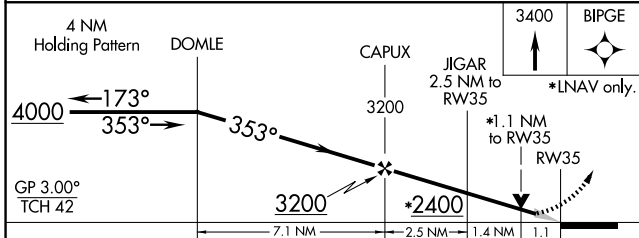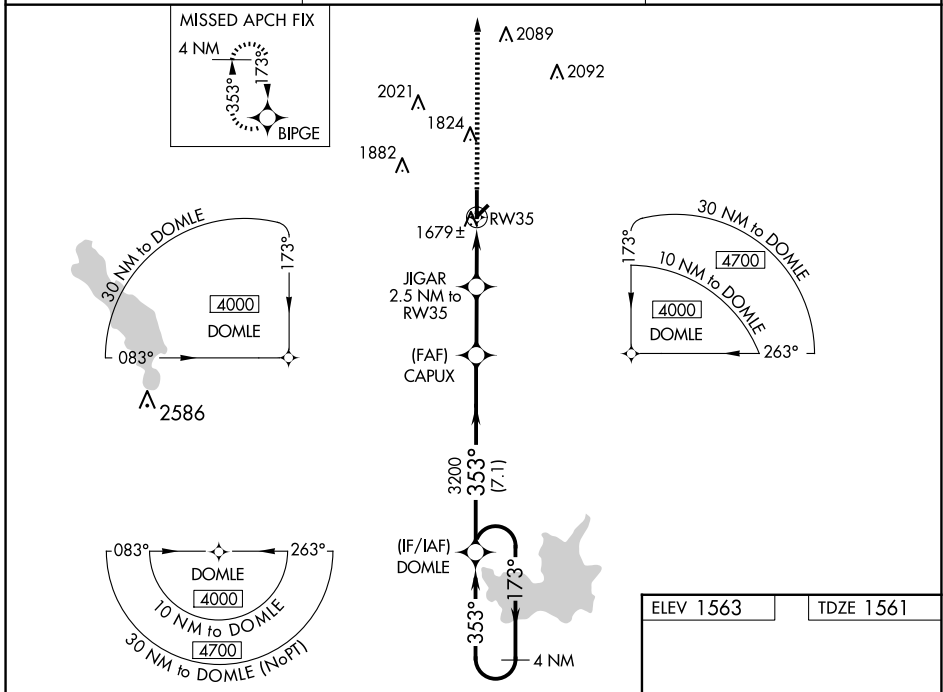

ELEV 1563	TDZE 1561
-----------	-----------

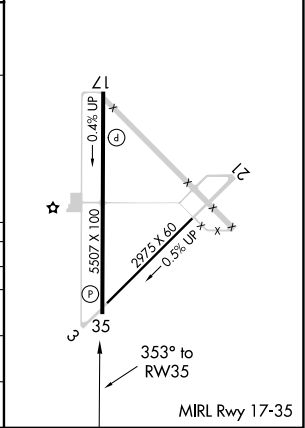

CATEGORY	A	B	C	D
LPV DA	1811-1		250 (300-1)	
LNAV/VNAV DA	1949-1¼		388 (400-1¼)	
LNAV MDA	1940-1	379 (400-1)	1940-1½	1940-2
		379 (400-1½)	379 (400-2)	379 (400-2)
CIRCLING	1980-1	2020-1	2320-2¼	2460-3
	417 (500-1)	457 (500-1)	757 (800-2¼)	897 (900-3)

SC-1, 11 JUN 2026 to 09 JUL 2026

SC-1, 11 JUN 2026 to 09 JUL 2026