


WAAS CH 45838 W11A	APP CRS 109°	Rwy Ldg 5400 TDZE 97 Apt Elev 97
--	------------------------	---

RNAV (GPS) RWY 11

ANIAK (ANI)(PANI)

RNP APCH.	⚠ ⚠ ❄️ -37°C Circling NA north of Rwy 11-29. Rwy 11 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV, LNAV/VNAV all Cats, LNAV Cat A. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 2 ½ SM.	MALSF 🚗 🚗 MISSED APPROACH: Climb to 1500 then climbing right turn to 3500 direct IKUFU and hold, continue climb-in-hold to 3500.
-----------	--	--

AWOS-3P 124.3	ANCHORAGE CENTER 118.15 251.05	CLNC DEL 118.15	CTAF 122.1 📻
-------------------------	--	---------------------------	------------------------

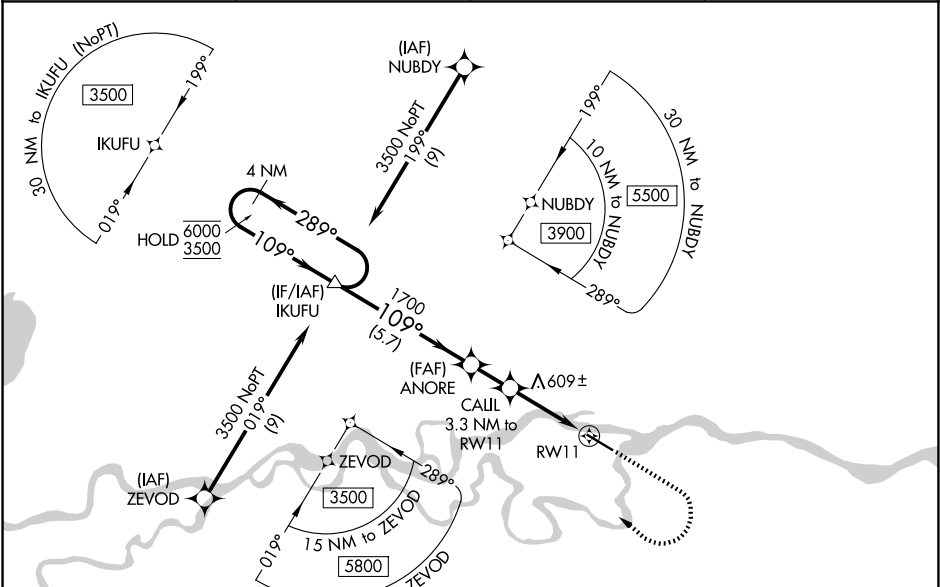

		ELEV 97		D TDZE 97	
		4 NM Holding Pattern 6000 ← 289° 3500 → 109° GP 3.00° TCH 35		ANORE 1700 CAUL 3.3 NM to RW11 *2.3 NM to RW11 RW11 *1160 1500 3500 IKUFU ↑ ↻ △ *LNAV only	
CATEGORY	A	B	C	D	
LPV DA	347-1 250 (300-1)				
LNAV/VNAV DA	994-4 897 (900-4)				
LNAV MDA	860-1 763 (800-1)	860-2 763 (800-2)			
CIRCLING	860-1 763 (800-1)	860-1¼ 763 (800-1¼)	860-2½ 763 (800-2½)	1200-3 1103 (1200-3)	HIRL Rwy 11-29 📻