
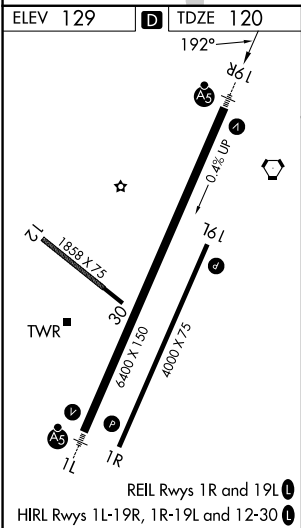


|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-BET | APP CRS | Rwy Ldg  | 6400 |
| 111.5         | 192°    | TDZE     | 120  |
| Chan 52       |         | Apt Elev | 129  |

ILS Y or LOC Y RWY 19R  
BETHEL (BET)(PABE)

|                                                                                                                                                                |       |                                                                                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----------------------------------------------------------------------------------------|
| DME required. RNAV 1-GPS required.                                                                                                                             | MALSR | MISSED APPROACH: Climb to 1700 then climbing right turn to 2000 direct ROLLR and hold. |
| ⚠ Circling NA west of Rwy 1L-19R. For inop ALS, increase S-LOC-19R Cat C/D visibility to RVR 4000.<br># RVR 1800 authorized with use of FD or AP or HUD to DA. |       |                                                                                        |

|               |                                 |                                  |                  |
|---------------|---------------------------------|----------------------------------|------------------|
| ATIS<br>119.8 | ANCHORAGE CENTER<br>125.2 372.0 | BETHEL TOWER ★<br>118.7 (CTAF) 0 | GND CON<br>121.7 |
|---------------|---------------------------------|----------------------------------|------------------|

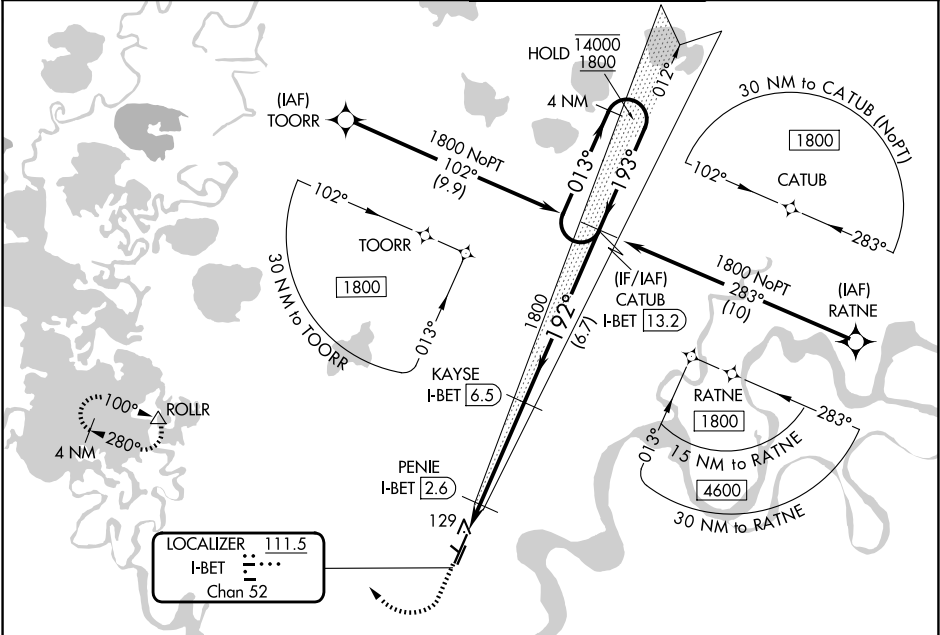

|            |                      |                      |                        |                      |                             |
|------------|----------------------|----------------------|------------------------|----------------------|-----------------------------|
| 1700       | 2000                 | ROLLR                | KAYSE I-BET 6.5        | CATUB I-BET 13.2     | 4 NM Holding Pattern        |
| *LOC only  | PENIE I-BET 2.6      | 1800                 | 1800                   | 1800                 | 013° → 14000<br>← 193° 1800 |
| I-BET 1.3  | *I-BET 2             | 560*                 |                        |                      | GS 3.00°<br>TCH 52          |
| 0.7        | 0.6                  | 3.9 NM               | 6.7 NM                 |                      |                             |
| CATEGORY   | A                    | B                    | C                      | D                    |                             |
| S-ILS 19R# | 320/24               | 200 (200-½)          |                        |                      |                             |
| S-LOC 19R  | 380/24               | 260 (300-½)          |                        |                      |                             |
| CIRCLING   | 500-1<br>371 (400-1) | 600-1<br>471 (500-1) | 600-1½<br>471 (500-1½) | 680-2<br>551 (600-2) |                             |