


WAAS CH 99440 W19B	APP CRS 193°	Rwy Ldg 4000 TDZE 124 Apt Elev 129
--	------------------------	---

RNAV (GPS) RWY 19L
BETHEL (BET) (PABE)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 600 then climbing right turn to 2000 direct ROLLR and hold.

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	---	-------------------------

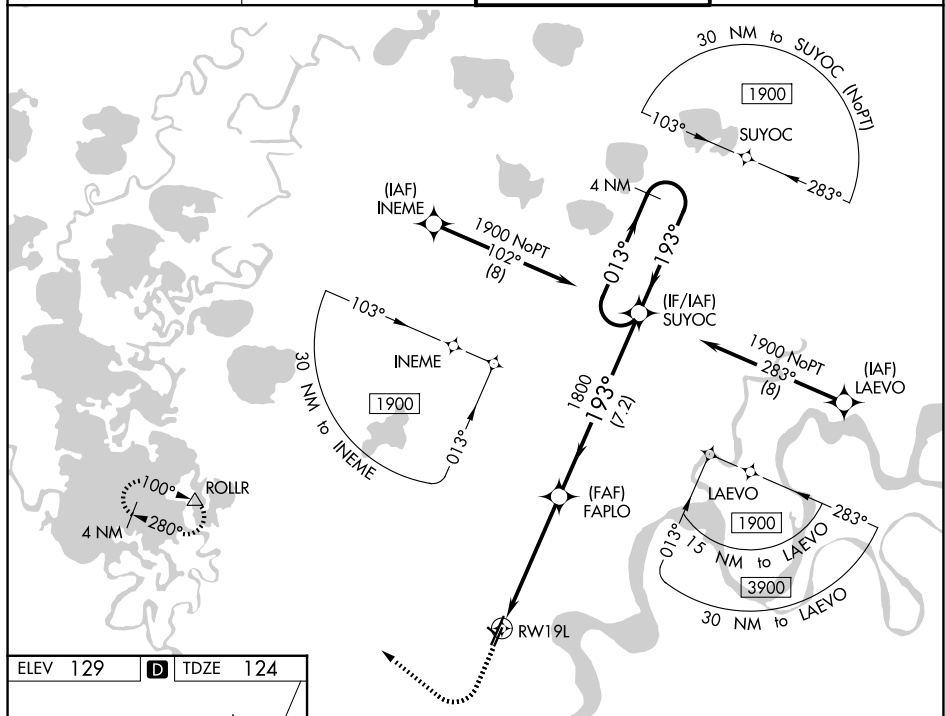

ELEV 129 **D** TDZE 124

1838 X 75
TWR
30
1838
19L
1R
4000 X 75
4000
19R
193°

REIL Rwy 1R and 19L
HIRL Rwy 1L-19R, 1R-19L and 12-30

600 ↑	2000 ↗	ROLLR △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 32).			
*LNAV only						
CATEGORY	A	B	C	D		
LPV DA	374-3/4 250 (300-3/4)					
LNAV/ VNAV	374-3/4 250 (300-3/4)					
LNAV MDA	500-1 376 (400-1)					
CIRCLING	500-1 371 (400-1)	600-1 471 (500-1)	600-1½ 471 (500-1½)	680-2 551 (600-2)		