
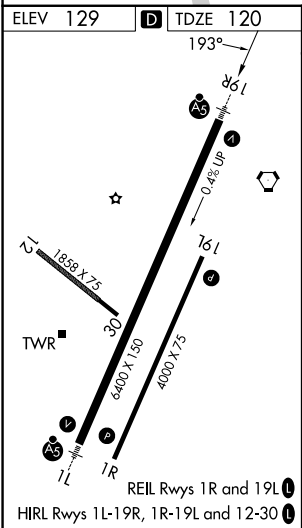


WAAS CH 70507 W19A	APP CRS 193°	Rwy Ldg 6400 TDZE 120 Apt Elev 129
--	------------------------	---

RNAV (GPS) RWY 19R

BETHEL (BET)(PABE)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F). Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.		MALSR	MISSED APPROACH: Climb to 1700 then climbing right turn to 2000 direct ROLL and hold.
ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7

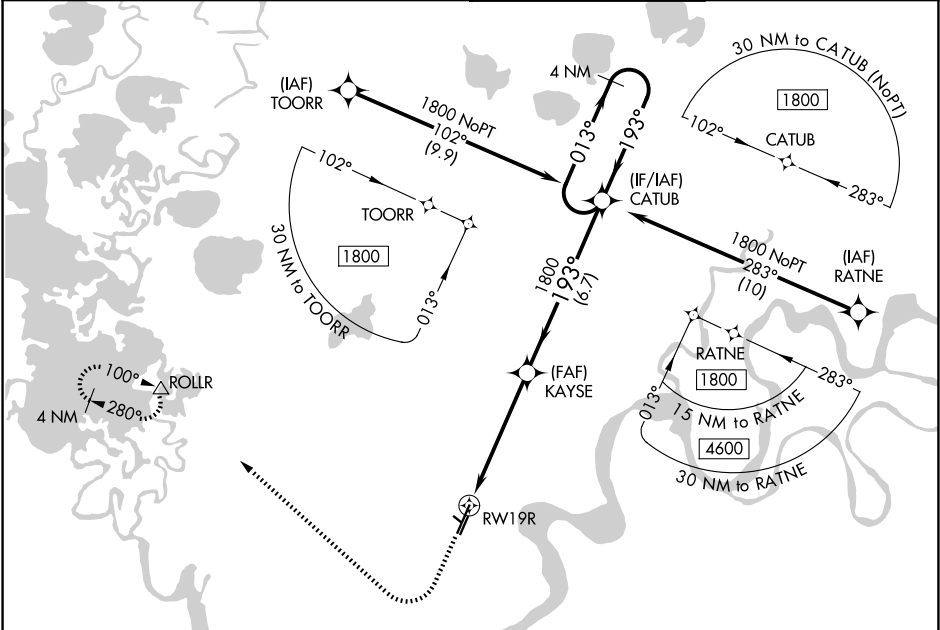

1700		2000		ROLLR					
* LNAV only									
CATEGORY		A		B		C		D	
LPV DA		320/24		200 (200-½)					
LNAV/ VNAV DA		479/40		359 (400-¾)					
LNAV MDA		560/24		440 (500-½)		560/45		440 (500-¾)	
CIRCLING		560-1 431 (500-1)		600-1 471 (500-1)		600-1½ 471 (500-1½)		680-2 551 (600-2)	