

26022

RNAV (GPS) RWY 25
BIG LAKE (BGQ) (PAGQ)

T Procedure NA at night. Rwy 25 helicopter visibility reduction
A NA below 1 SM NA. Use Anchorage altimeter setting.

MISSED APPROACH: Climb to 3000 direct JEBIP and on track 260° to HEVEB and hold.

ANC ASOS 135.5	ANCHORAGE APP CON 118.6	CTAF 122.80
--------------------------	-----------------------------------	-----------------------

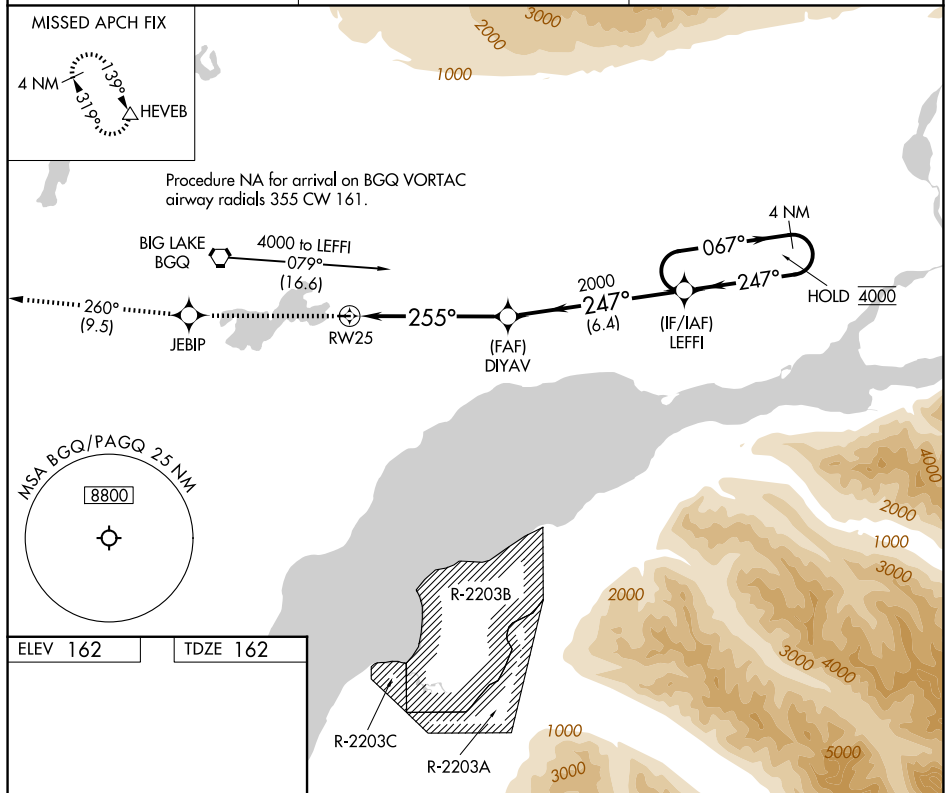


Diagram illustrating the MRL Rwy 7-25 holding pattern. The pattern is a series of turns: a 255° turn, followed by a 247° turn, then a 067° turn, and finally a 247° turn. The pattern is 4 NM long. The diagram also shows the 3000, JEBIP, HEVEB, and LEFFI waypoints. The 2000 ft altitude is marked at the start of the pattern. The 255° turn is marked with a 3.00° TCH 40. The 247° turn is marked with a 247° heading. The 067° turn is marked with a 067° heading. The 247° turn is marked with a 247° heading. The 4 NM holding pattern is marked with a 4 NM label.

CATEGORY	A	B	C	D
LNAV MDA	1020-1 858 (900-1)	1020-1¼ 858 (900-1¼)	1020-2½ 858 (900-2½)	NA
CIRCLING	1020-1¼ 858 (900-1¼)	1020-2½ 858 (900-2½)	1020-2½ 858 (900-2½)	NA

BIG LAKE (BGQ) (PAGQ)
RNAV (GPS) RWY 25

AK, 14 MAY 2026 to 09 JUL 2026