WAAS	APP CRS	Rwy Idg	3897
CH 65712	262°	TDZE	784
W26A		Apt Elev	785

RNAV (GPS) RWY 26

DIXON MUNI-CHARLES R WALGREEN FLD (C73)

RNP APCH - GPS.

T NA Baro-VNAV and VDP NA when using Rochelle altimeter setting. Rwy 26 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Rochelle altimeter setting and increase LPV DA to 1074 feet and all visibilities ⅛ SM; increase LNAV/VNAV DA to 1266 feet; increase all MDAs 40 feet and LNAV visibility Cat C ⅛ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH: Climb to 2700 direct UVOVE and hold.

AWOS-AV	ROCKFORD APP CON	UNICOM
118.575	126.0 327.0	123.05 (CTAF) L

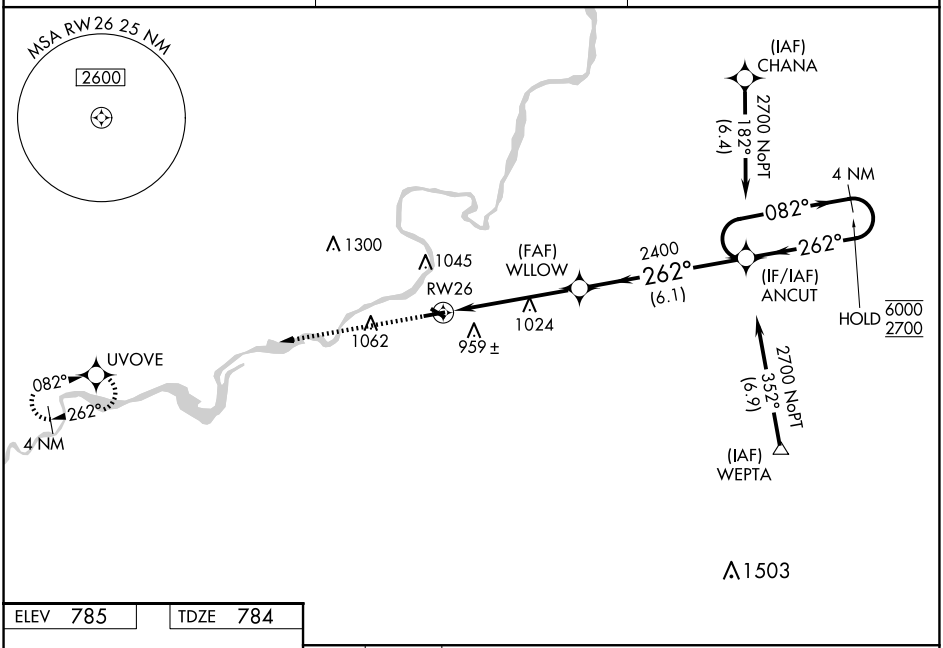

ELEV 785	TDZE 784



REIL Rwy 8 L
MIRL Rwys 8-26 and 12-30 L

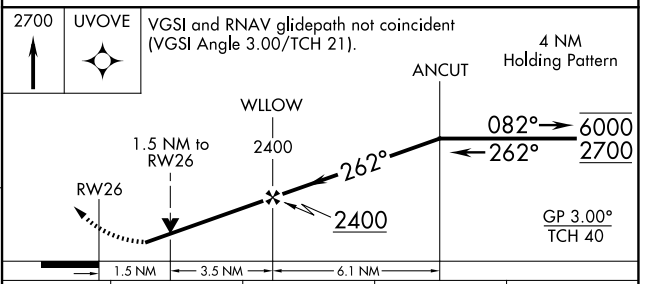

CATEGORY	A	B	C	D
LPV DA	1034-¾ 250 (300-¾)			NA
LNAV/VNAV DA	1226-1⅜ 442 (500-1⅜)			NA
LNAV MDA	1280-1 496 (500-1)		1280-1⅜ 496 (500-1⅜)	NA
CIRCLING	1300-1 515 (600-1)	1400-1 615 (700-1)	1420-1¾ 635 (700-1¾)	NA

EC-3, 11 JUN 2026 to 09 JUL 2026
EC-3, 11 JUN 2026 to 09 JUL 2026