

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>50409</b><br><b>W20A</b> | APP CRS<br><b>202°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>7026</b><br><b>905</b><br><b>913</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 20

DE KALB TAYLOR MUNI (DKB)



**⚠** Baro-VNAV NA when using Aurora altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F).  
**⚠** DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. VDP NA when using Aurora altimeter setting. When local altimeter setting not present, use Aurora altimeter setting and increase all DA 61 feet and all MDA 80 feet; increase all LPV and LNAV/VNAV visibilities, LNAV Cat D visibility, and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH:  
Climb to 2700 direct TUGBY and hold.

|                          |                                       |                                 |
|--------------------------|---------------------------------------|---------------------------------|
| AWOS-3<br><b>119.075</b> | CHICAGO APP CON<br><b>133.5 349.0</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|--------------------------|---------------------------------------|---------------------------------|

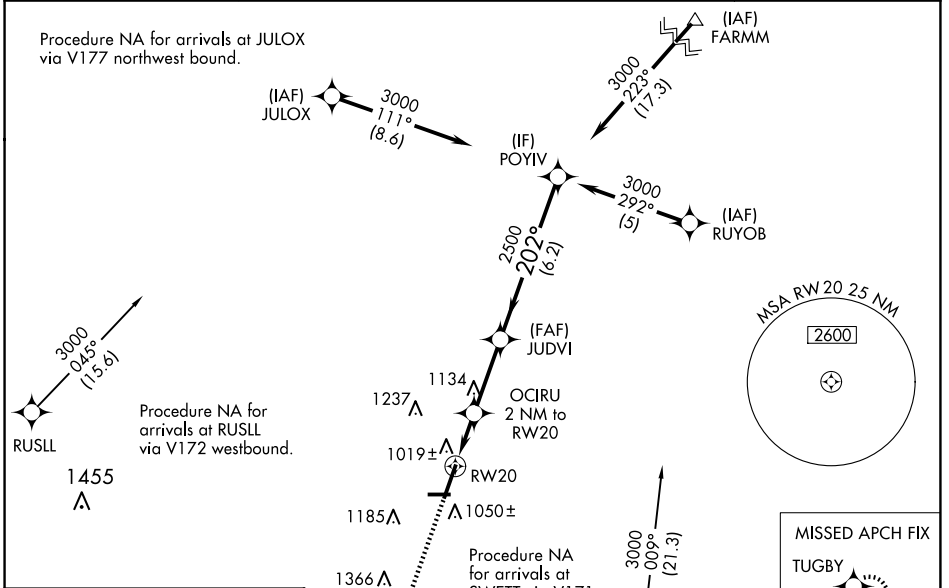

|          |          |
|----------|----------|
| ELEV 913 | TDZE 905 |
|----------|----------|

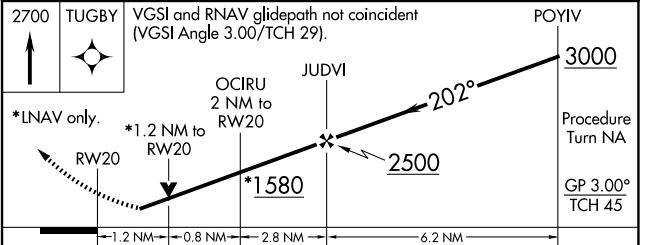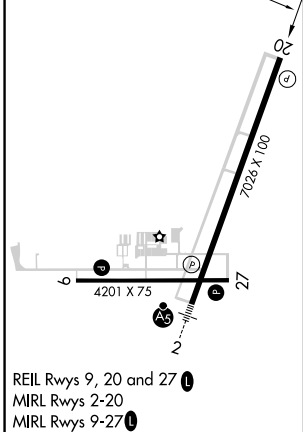

| CATEGORY     | A                     | B                     | C                     | D                       |
|--------------|-----------------------|-----------------------|-----------------------|-------------------------|
| LPV DA       |                       | 1155-¾                | 250 (300-¾)           |                         |
| LNAV/VNAV DA |                       | 1430-1¾               | 525 (600-1¾)          |                         |
| LNAV MDA     | 1320-1                | 415 (500-1)           | 1320-1¼               | 415 (500-1¼)            |
| CIRCLING     | 1360-1<br>447 (500-1) | 1500-1<br>587 (600-1) | 1600-2<br>687 (700-2) | 1740-2¾<br>827 (900-2¾) |

EC-3, 11 JUN 2026 to 09 JUL 2026

EC-3, 11 JUN 2026 to 09 JUL 2026