WAAS	APP CRS	Rwy Ldg	5002
CH 81903	269°	TDZE	67
W27A		Apt Elev	68

RNAV (GPS) RWY 27
HOUSTON/SOUTHWEST (AXH)

RNP APCH.

▼ ▲ NA — For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Rwy 27 helicopter visibility reduction below ¾ SM NA. Obtain local altimeter setting on CTAF; when not received use William P. Hobby altimeter setting and increase all DAs/MDA's 40 feet, and LPV, LNAV Cat C visibility ¼ mile. Baro-VNAV NA when using William P. Hobby altimeter setting.

MISSED APPROACH: Climb to 2700 direct RUPRE and via 200° track to KEEDS.

AWOS-3	HOUSTON APP CON	CLNC DEL	UNICOM
123.625	123.8 257.7	120.8	123.0 (CTAF) L

RADAR REQUIRED

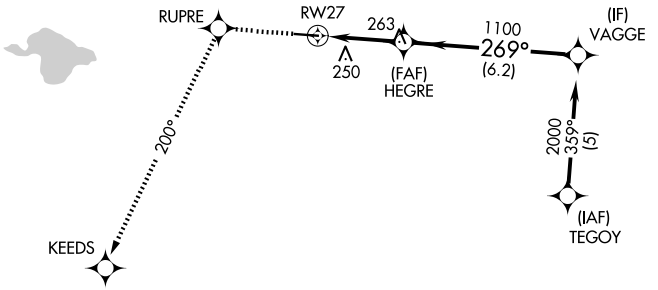



ELEV 68 | TDZE 67



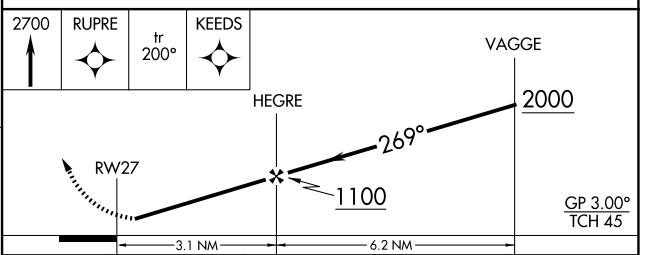

CATEGORY	A	B	C	D
LPV DA	367-1 300 (300-1)			NA
LNAV/VNAV DA	604-2 537 (600-2)			NA
LNAV MDA	560-1 493 (500-1)		560-1¼ 493 (500-1¼)	NA

REIL Rwy 9 and 27 L
MIRL Rwy 9-27 L

SC-5, 11 JUN 2026 to 09 JUL 2026
SC-5, 11 JUN 2026 to 09 JUL 2026