

SW-3, 09 JUL 2026 to 06 AUG 2026

CINC DEL  
118.0 348.6  
CPDLC  
SOCAL DEP CON  
124.6 298.85


TOP ALTITUDE:  
FL230

NOTE: DME/DME/IRU or GPS required.  
NOTE: RNAV 1.  
NOTE: RADAR required.  
NOTE: Turbojet only.  
NOTE: MISEN transition restricted to aircraft landing LAS terminal area.  
NOTE: HAILO transition ATC assigned only.

(SLAPP2.SLAPP) 20254  
SLAPP TWO DEPARTURE (RNAV)

AL-67 (FAA)

BOB HOPE (BUR)  
BURBANK, CALIFORNIA

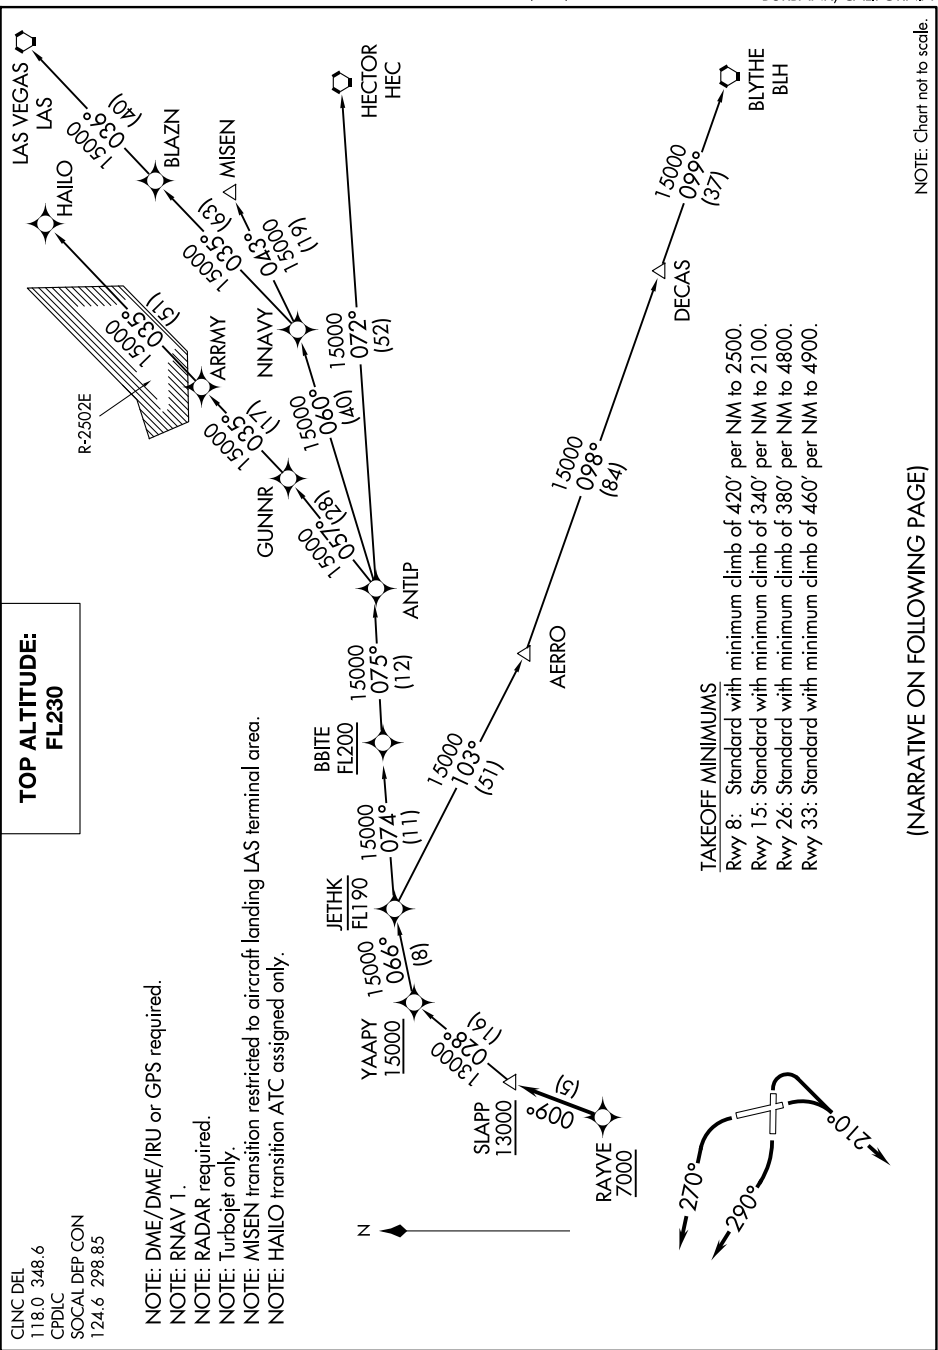

**TAKEOFF MINIMUMS**  
Rwy 8: Standard with minimum climb of 420' per NM to 2500.  
Rwy 15: Standard with minimum climb of 340' per NM to 2100.  
Rwy 26: Standard with minimum climb of 380' per NM to 4800.  
Rwy 33: Standard with minimum climb of 460' per NM to 4900.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SLAPP TWO DEPARTURE (RNAV)  
(SLAPP2.SLAPP) 10SEP20

BURBANK, CALIFORNIA  
BOB HOPE (BUR)