


LOC/DME I-PXP 110.7 Chan 44	APP CRS 281°	Rwy Ldg TDZE 799 Apt Elev 799
---	------------------------	---


ILS or LOC RWY 28
CLEVELAND-HOPKINS INTL (CLE)

RNAV 1. From HARDR: RNAV 1-DME/DME/IRU or GPS required for procedure entry. Aircraft not DME/DME/IRU or GPS equipped - RADAR required for procedure entry. DME required.		MALSF 	MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.
Circling Rwy 10 NA at night. Inop table does not apply to S-ILS 28.			

D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45
-------------------------	--	--	--------------------------------

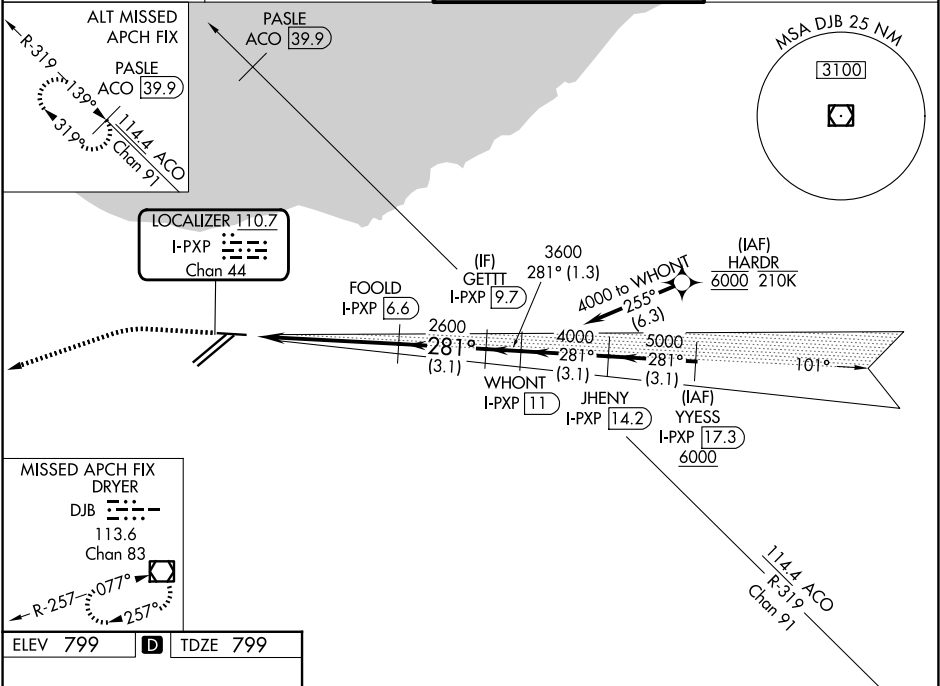

ELEV 799	D	TDZE 799
----------	---	----------

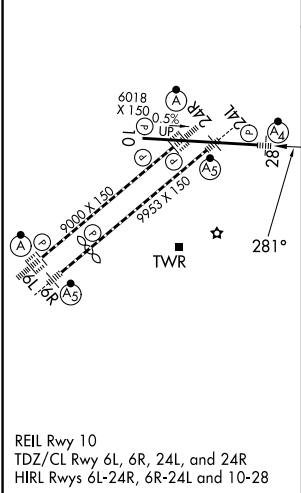

1400	3000	DJB		
*LOC only.				
CATEGORY	A	B	C	D
S-ILS 28	999/40 200 (200-¾)			
S-LOC 28	1340/40	541 (600-¾)	1340-1 ⅜	541 (600-1 ⅜)
CIRCLING	1420-1	621 (700-1)	1420-1 ¾	1420-2
			621 (700-1 ¾)	621 (700-2)

EC-2, 09 JUL 2026 to 06 AUG 2026

EC-2, 09 JUL 2026 to 06 AUG 2026