
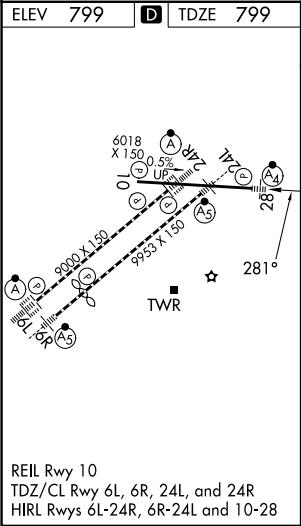
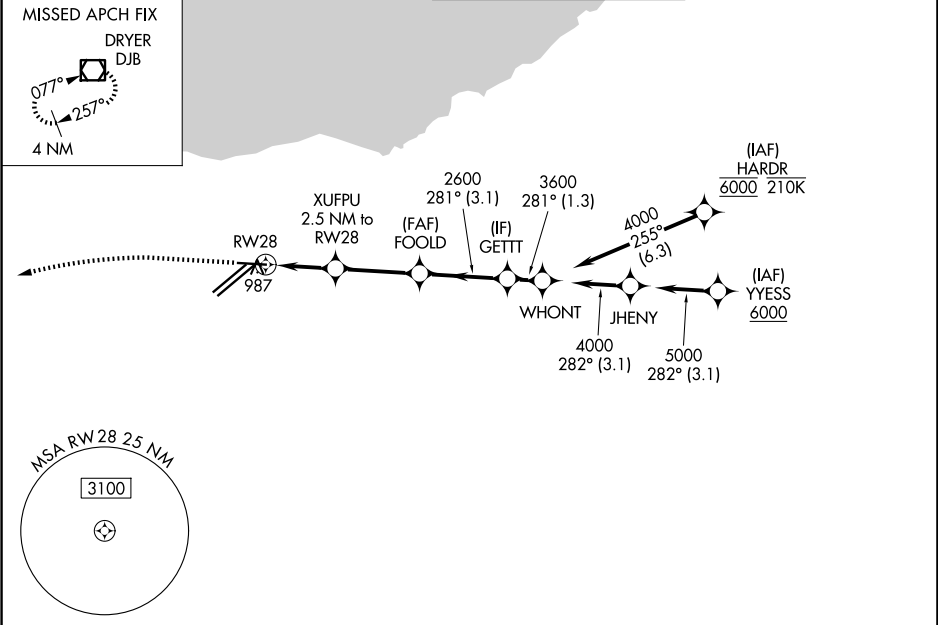


WAAS CH 40109 W28A	APP CRS 281°	Rwy Ldg 6018 TDZE 799 Apt Elev 799
--	------------------------	---

RNAV (GPS) RWY 28
CLEVELAND-HOPKINS INTL (CLE)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Circling Rwy 10 NA at night. Inop table does not apply to LPV.		MALSF 	MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 direct DJB VOR/DME and hold.
D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45

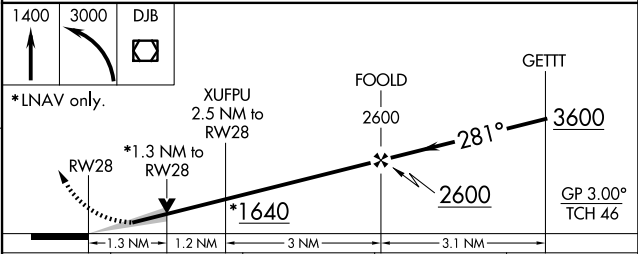

1400 ↑	3000 ↖	DJB 							
*LNAV only.									
RW28		*1.3 NM to RW28		XUFPU 2.5 NM to RW28		FOOLD 2600		GETTT 3600	
1.3 NM		1.2 NM		3 NM		3.1 NM		GP 3.00° TCH 46	
CATEGORY		A		B		C		D	
LPV DA				999/40		200 (200-¾)			
LNAV/ VNAV DA				1168/40		369 (400-¾)			
LNAV MDA		1260/40		461 (500-¾)		1260/60		461 (500-1¼)	
CIRCLING		1420-1		621 (700-1)		1420-1¾ 621 (700-1¾)		1420-2 621 (700-2)	