


APP CRS	Rwy Ldg	9000
058°	TDZE	773
	Apt Elev	799


RNAV (RNP) Z RWY 6L
CLEVELAND-HOPKINS INTL (CLE)

RNP AR APCH.	For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). For inop ALS, increase RNP 0.17 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to RVR 6000.	ALSF-2	MISSED APPROACH: Climb to 3000 direct ACAPO and on track 001° to PASLE and hold.
--------------	--	--------	--

D-ATIS 127.85	CLEVELAND APP CON 126.55 346.325	CLEVELAND TOWER 124.5 273.45	GND CON 121.7 273.45
------------------	-------------------------------------	---------------------------------	-------------------------

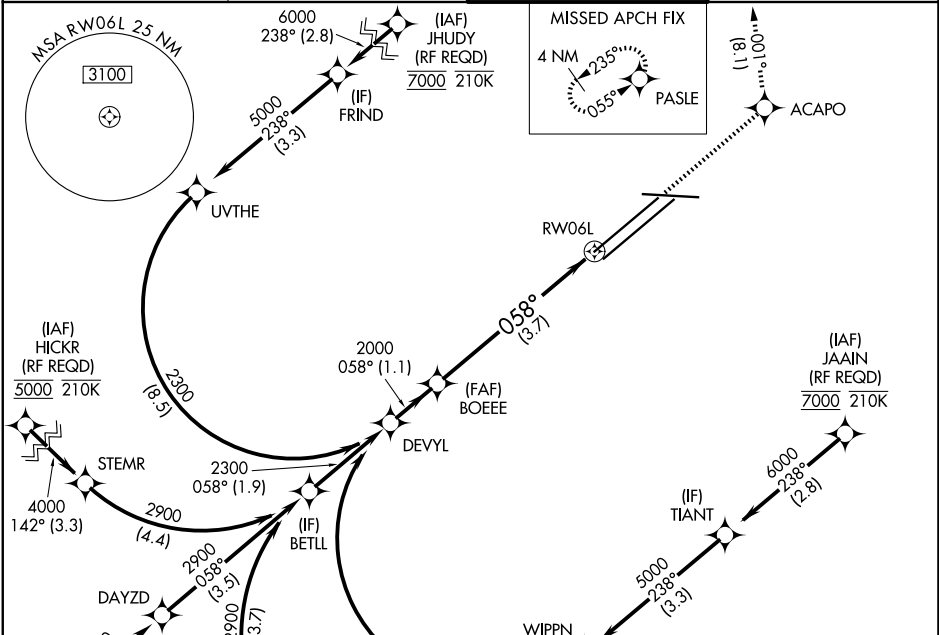


ELEV 799	TDZE 773
----------	----------

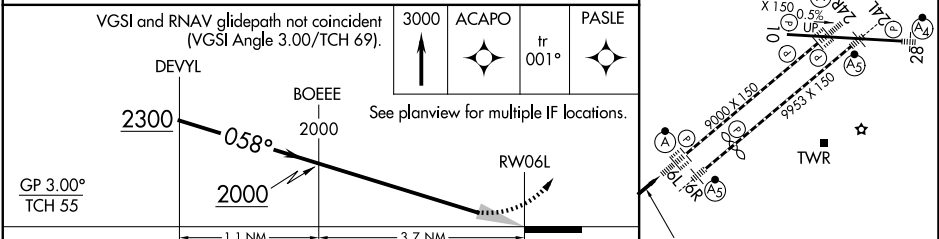

CATEGORY	A	B	C	D
RNP 0.17 DA		1123/30	350 (400-5%)	
RNP 0.30 DA		1176/40	403 (400-3/4)	

AUTHORIZATION REQUIRED

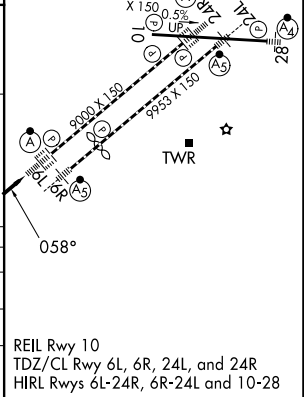

EC-2, 09 JUL 2026 to 06 AUG 2026

EC-2, 09 JUL 2026 to 06 AUG 2026