

WAAS CH 49137 W10A	APP CRS 096°	Rwy Ldg 3463 TDZE 1013 Apt Elev 1048
--	------------------------	---



RNAV (GPS) RWY 10

GREENVILLE DOWNTOWN (GMU)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C (22°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Grceer altimeter setting and increase all DA 29 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility 1/8 mile and Circling Cat C visibility 1/4 mile.

MISSED APPROACH: Climb to 3700 direct JADOT and hold.


ATIS 127.075	GREER APP CON ★ 118.8 270.275	GREENVILLE TOWER ★ 119.9 (CTAF) 0 257.7	GND CON 121.25	UNICOM 122.95
-----------------	----------------------------------	--	-------------------	------------------

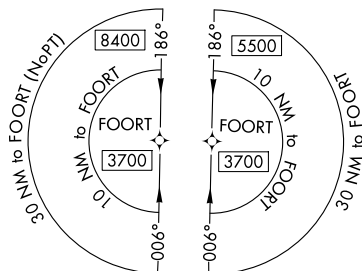Donaldson
Eld

ELEV	1048	D	TDZE	1013
------	------	----------	------	------

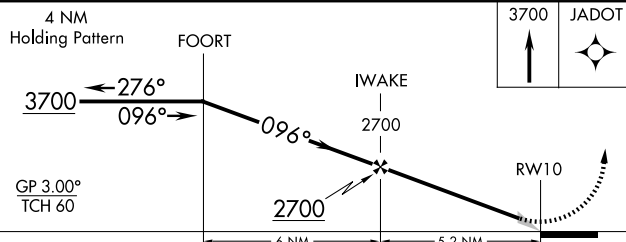

CATEGORY		A		B		C		D	
LPV	DA	1269-1 256 (300-1)							
LNAV/ VNAV	DA	1351-1½ 338 (400-1½)							
LNAV	MDA	1580-1 567 (600-1)				1580-1½ 567 (600-1½)			
CIRCLING		1620-1 572 (600-1)				1780-2 732 (800-2)		1860-2¾ 812 (900-2¾)	



REIL Rwy 28
REIL Rwy 19 **L**
MIRL Rwy 10-28
HIRL Rwy 1-19 **L**