

LOC/DME I-SNU 110.3 Chan 40	APP CRS 170°	Rwy Ldg 10000 TDZE 485 Apt Elev 501
---	------------------------	--

ILS or LOC RWY 17R

LOUISVILLE MUHAMMAD ALI INTL (SDF)

RADAR required for procedure entry at CWAYN.
DME or RADAR required.


⚠ Simultaneous approach authorized. Circling Rwy 11 NA at night.
⚠ For Inop ALS, increase S-LOC 17R Cat C/D visibility to RVR 6000.

MALSR


A5

MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 275° and on IIU VORTAC R-279 to DAMEN INT/24.5 DME and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6
--------------------------	--	--	-------------------------------

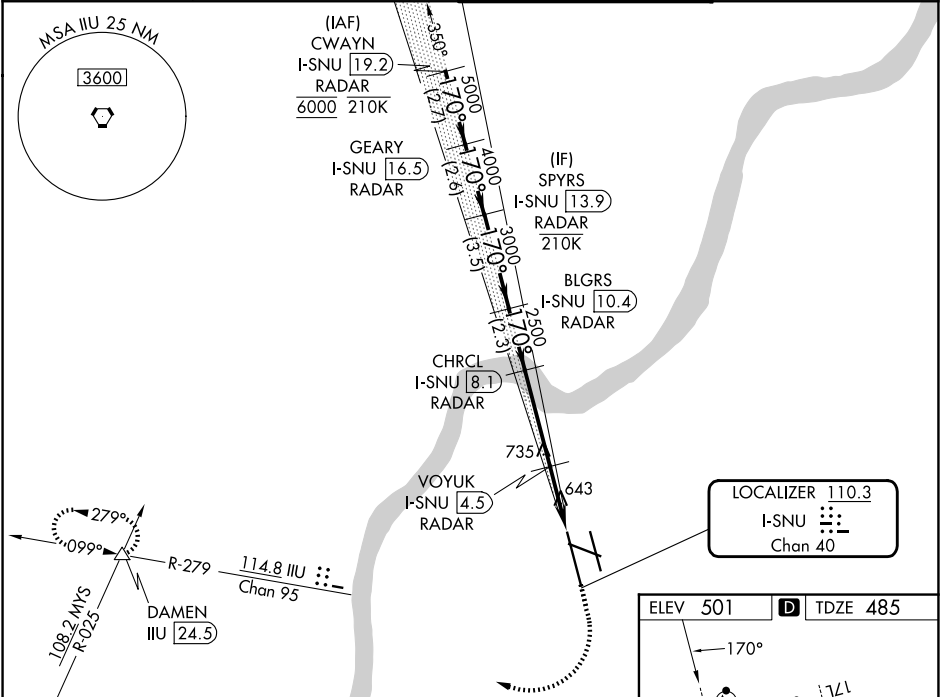

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 64).				
SPYRS I-SNU 13.9 RADAR	BLGRS I-SNU 10.4 RADAR	CHRWL I-SNU 8.1 RADAR	VOYUK I-SNU 4.5 RADAR	I-SNU 3 I-SNU 1.9
4000	3000	2500	1300	
GS 3.00° TCH 50				
3.5 NM	2.3 NM	3.6 NM	1.6 NM	1.1
CATEGORY	A	B	C	D
S-ILS 17R	685/18 200 (200-½)			
S-LOC 17R	900/24	415 (400-½)	900/40	415 (400-¾)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

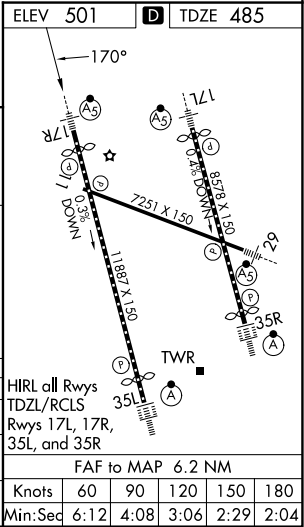

SE-1, 09 JUL 2026 to 06 AUG 2026

SE-1, 09 JUL 2026 to 06 AUG 2026