

WAAS CH 86500 W01A	APP CRS 011°	Rwy Ldg TDZE 289 Apt Elev 298
--	------------------------	---

RNAV (GPS) RWY 1

KEY FLD (MEI)

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA southeast of Rwy 1 and 22. DME/DME RNP-0.3 NA.

When local altimeter setting not received, use Hattiesburg/Laurel Rgnl altimeter setting and increase all DA 138 feet and all MDA 140 feet, LPV all Cats visibility to RVR 3100, LNAV/VNAV all Cats and LNAV Cats C, D, and E visibilities to 1½ mile, and Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. For inop MALSR increase LPV Cat E to RVR 4000, LNAV/VNAV Cat E visibility to RVR 6000, and LNAV Cat E visibility to 1½ mile. For inop MALSR when using Hattiesburg/Laurel Rgnl altimeter setting, increase LPV all Cats visibility to RVR 5000, LNAV/VNAV Cat E visibility to 1½ mile, and LNAV Cat E visibility to 1¾ mile. VDP and Baro-VNAV NA when using Hattiesburg/Laurel Rgnl altimeter setting. Night landing: Rwy 22 NA. ** RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hattiesburg/Laurel Rgnl altimeter setting.

MALSR

MISSED APPROACH:
Climb to 800 then climbing left turn to 3000 direct PAULD and hold.

ATIS 126.475 291.675	MERIDIAN APP CON★ 120.5 269.325	KEY TOWER★ 133.975 (CTAF) 257.8	GND CON 121.9 348.6	UNICOM 122.95
--------------------------------	---	---	-------------------------------	-------------------------

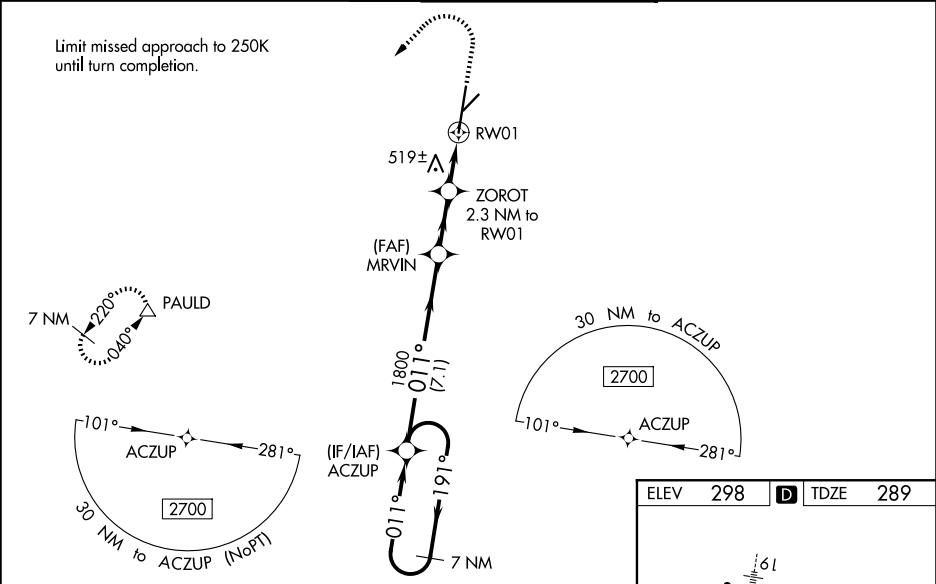

7 NM Holding Pattern		ACZUP		MRVIN		ZOROT		PAULD	
2700		191°		011°		1800		800	
GP 3.00°		TCH 55		011°		2.3 NM to RW01		3000	
		7.1 NM		2.3 NM		0.9 NM		*LNAV only.	
		1800		*1060		1.4 NM to RW01		△	
		1.4 NM		1.4 NM		1.4 NM			
CATEGORY		A		B		C		D	
LPV DA **		489/24		200 (200-½)					
LNAV/VNAV DA		709/47		420 (500-1)					
LNAV MDA		780/24		491 (500-½)		780/50		491 (500-1)	
CIRCLING		860-1		880-1		960-1¾		1120-2¾	
		562 (600-1)		582 (600-1)		662 (700-1¾)		822 (900-2¾)	
								822 (900-3)	

