

HI-ILS or LOC/DME Z RWY 16

LOC I-SKF 110.1	APCH CRS 158°	Rwy Idg 11,550 TDZE 690 Arpt Elev 690
---------------------------	-------------------------	--

[USAF]


KELLY FLD (KSKF)

▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile.
 **When ALS inop, increase RVR to 60 and vis to 1½ miles.
 ***Circling not authorized E of Rwy 16-34.




MISSED APPROACH: Climb to 2500 via KSY R-163 until 4 DME, then continue climb to 3000 to FITER/15 DME and hold.

ATIS 120.45 273.5	SAN ANTONIO APP CON 118.05 353.5	KELLY TOWER 124.3 322.35	GND CON 121.8 289.4
-----------------------------	--	------------------------------------	-------------------------------

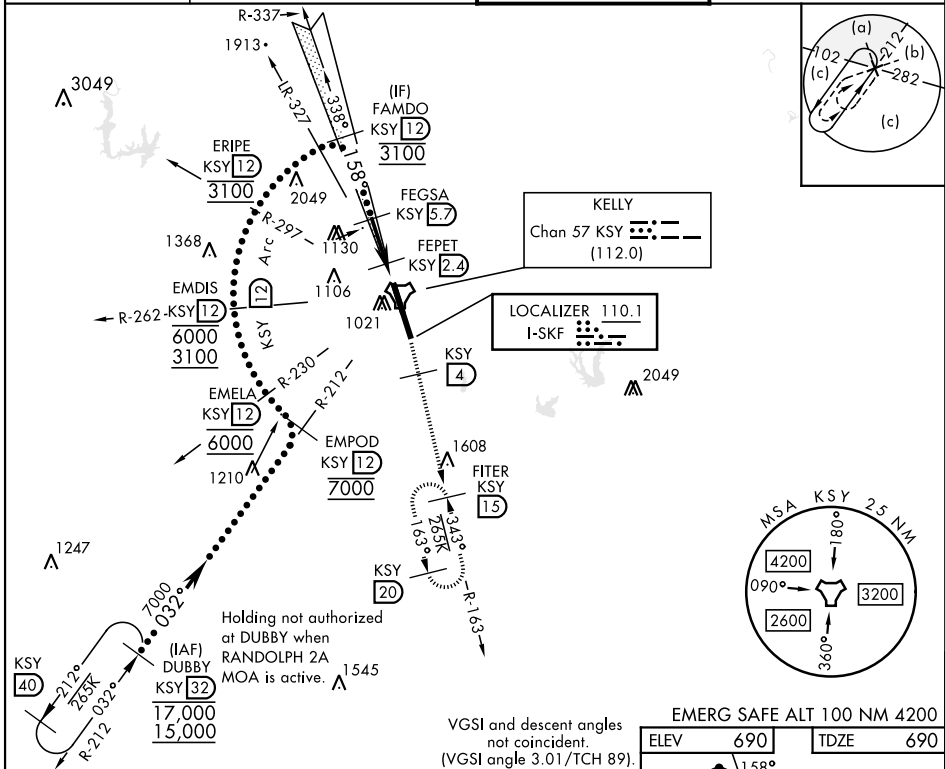

VGSI and descent angles not coincident. (VGSI angle 3.01/TCH 89).			
EMERG SAFE ALT 100 NM 4200			
ELEV	690	TDZE	690
GS 3.00°	TCH 57		
CATEGORY	C	D	E
S-ILS 16 *	890/24	200	(200-½)
S-LOC/ **	1080/35	390	(400-¾)
DME 16			
***	1340-1¾	1900-3	1210 (1300-3)
CIRCLING	650 (700-1¾)		

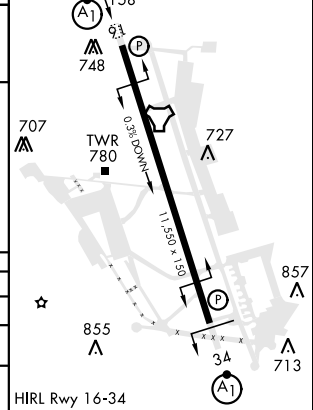

HI-ILS or LOC/DME Z RWY 16