

## ILS or LOC/DME Y RWY 16

|                                  |                         |                                                                  |
|----------------------------------|-------------------------|------------------------------------------------------------------|
| LOC I-SKF<br><b><u>110.1</u></b> | APCH CRS<br><b>158°</b> | Rwy Idg <b>11,550</b><br>TDZE <b>690</b><br>Arpt Elev <b>690</b> |
|----------------------------------|-------------------------|------------------------------------------------------------------|

[USAF]


KELLY FLD (KSKF)

**T** \*When ALS inop, increase RVR to 40 and vis to  $\frac{3}{4}$  mile.  
 \*\*When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE RVR to 60 and vis to  $1\frac{1}{8}$  miles.


ALSF-1

**MISSED APPROACH:** Climb to 2500 via KSY R-163 until 4 DME, then continue climb to 3000 to FITER/15 DME and hold. Non-TACAN equipped aircraft expect alternate missed approach instructions.

|                      |                                     |                       |                        |
|----------------------|-------------------------------------|-----------------------|------------------------|
| ATIS<br>120.45 273.5 | SAN ANTONIO APP CON<br>118.05 353.5 | TOWER<br>124.3 322.35 | GND CON<br>121.8 289.4 |
|----------------------|-------------------------------------|-----------------------|------------------------|

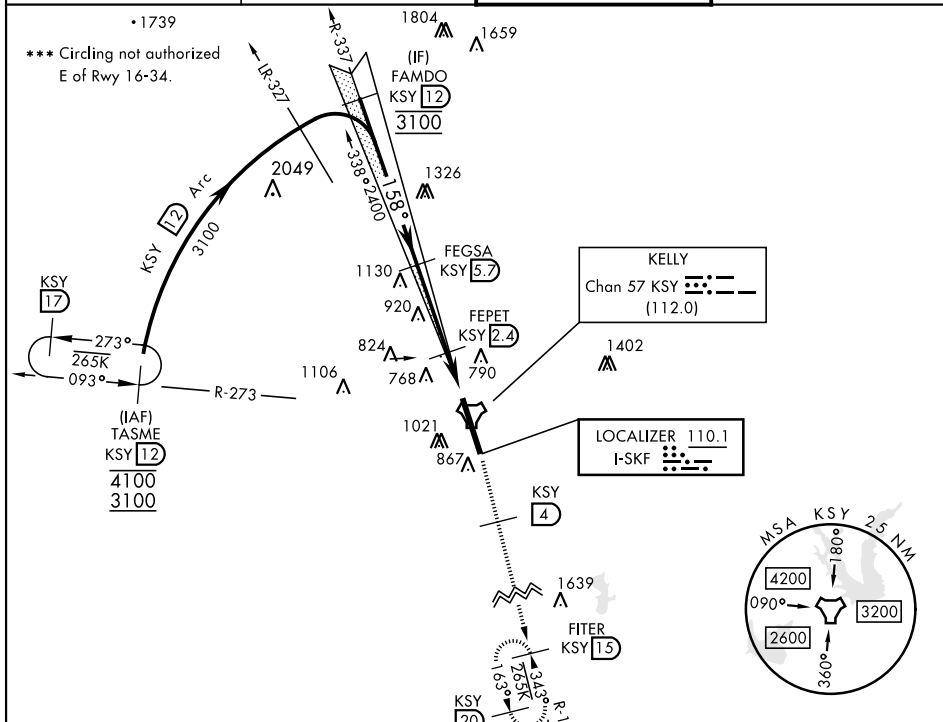

EMERG SAFE ALT 100 NM 4200

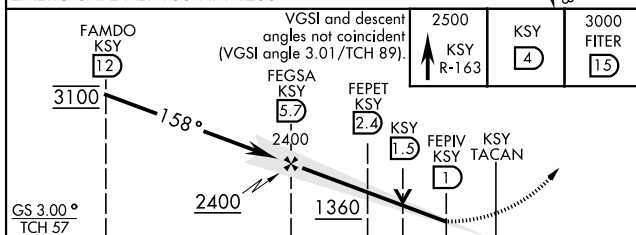

| CATEGORY              | A                     | B                     | C                       | D                       | E |
|-----------------------|-----------------------|-----------------------|-------------------------|-------------------------|---|
| S-ILS 16 *            | 890/24                |                       | 200                     | (200-½)                 |   |
| S-LOC/DME<br>16 **    | 1080/24 390 (400-½)   |                       | 1080/35 390 (400-¾)     |                         |   |
| <b>C</b> CIRCLING *** | 1200-1<br>510 (600-1) | 1280-1<br>590 (600-1) | 1340-1¾<br>650 (700-1¾) | 1900-3<br>1210 (1300-3) |   |

