

LOC I-JOU
111.1

APP CRS
210°

Rwy Ldg	8999
TDZE	1430
Apt Elev	1430

ILS or LOC RWY 21
JOE FOSS FLD (FSD)

JOE FOSS FLD (FSD)



For inop ALS, increase S-LOC 21 Cats C/D visibility to 1 7/8 SM and S-LOC 21 WADRI fix minimums Cats C/D visibility to RVR 5500.



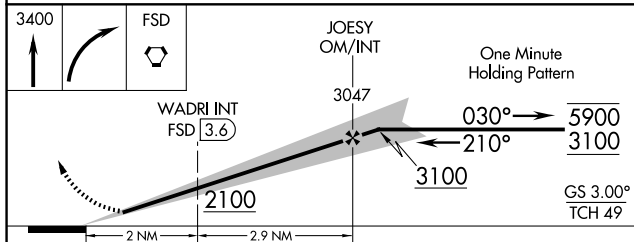

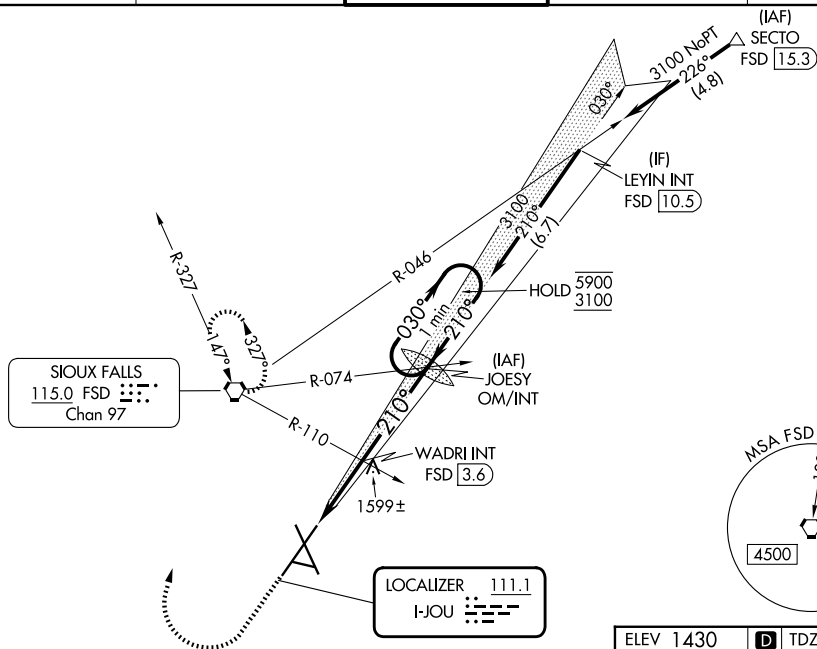
MISSED APPROACH: Climb to 3400 then right turn direct FSD VORTAC and hold.

ATIS
126.6

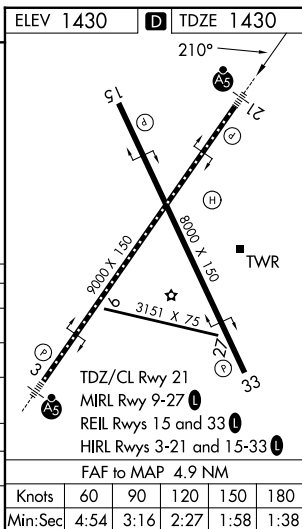
SIOUX FALLS APP CON ★
 125.8 284.725

SIOUX FALLS TOWER★
 118.3 (CTAF) **L** 257.8

GND CON
121.9 348.6

UNICOM
122.95

CATEGORY	A	B	C	D
S-ILS 21	1630/18 200 (200-½)			
S-LOC 21	2100/24	670 (700-½)	2100-1½	670 (700-1½)
CIRCLING	2100-1	670 (700-1)	2100-1⅞ 670 (700-1⅞)	2200-2½ 770 (800-2½)
WADRI FIX MINIMUMS				
S-LOC 21	1800/24	370 (400-½)	1800/35	370 (400-⅝)
CIRCLING	1980-1	550 (600-1)	2060-1¾ 630 (700-1¾)	2200-2½ 770 (800-2½)



SIOUX FALLS, SOUTH DAKOTA
Amdt 10D 07AUG25

43°35'N-96°45'W

JOE FOSS FLD (FSD)
ILS or LOC RWY 21

NC-1, 09 JUL 2026 to 06 AUG 2026