


WAAS CH 72905 W04A	APP CRS 039°	Rwy Ldg TDZE Apt Elev	5000 2885 2885
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 4

LIBERAL MID-AMERICA RGNL (L.B.L.)

RNP APCH - GPS.	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Circling NA east of Rwy 17-35. When local altimeter setting not received, use GUY altimeter setting and increase LPV DA to 3248 feet; increase LNAV/VNAV DA to 3412 feet and all visibilities ¾ SM. Increase all MDAs 120 feet and LNAV visibility Cat C/D ¾ SM, and Circling visibility Cat C/D ¼ SM. Baro-VNAV and VDP NA when using GUY altimeter setting.	MISSED APPROACH: Climb to 4800 direct NULEE and hold.

AWOS-3PT 118.375	KANSAS CITY CENTER 134.0 257.625	UNICOM 122.8 (CTAF)
----------------------------	--	-------------------------------

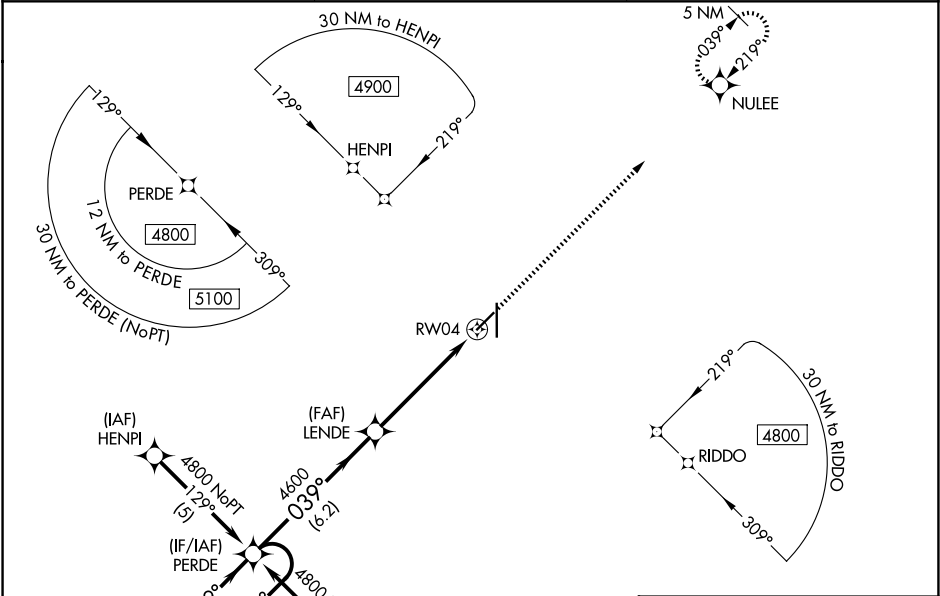

ELEV 2885		D TDZE 2885	
5 NM Holding Pattern		4800 NULEE	
GP 3.00° TCH 39		1.5 NM to RW04	
6.2 NM		3.7 NM	
CATEGORY	A	B	C
LPV DA	3136-1		251 (300-1)
LNAV/VNAV DA	3300-1 ¾		415 (500-1 ¾)
LNAV MDA	3400-1	515 (600-1)	3400-1 ¾ 515 (600-1 ¾)
CIRCLING	3400-1	515 (600-1)	3400-1 ½ 515 (600-1 ½) 3640-2 ½ 755 (800-2 ½)