

WAAS
CH **93808**
W35A

APP CRS
355°

Rwy Ldg
TDZE **1008**
Apt Elev **1009**

RNAV (GPS) RWY 35
PONCA CITY RGNL (PNC)

RNP APCH - GPS.


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using WLD altimeter setting. When local altimeter setting not received, use WLD altimeter setting and increase LPV DA to 1377 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 1560 feet and all visibilities ⅓ SM. Increase all MDAs 100 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ½ SM.

ODALS

MISSED APPROACH:
Climb to 2800 direct TOMHO and hold.

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

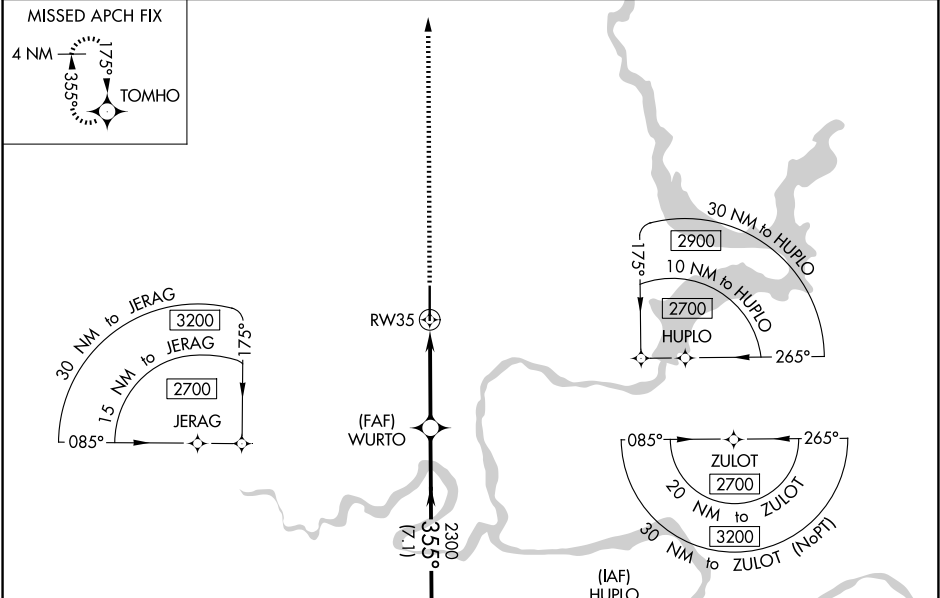

ELEV 1009	TDZE 1008
HIRL Rwy 17-35 0	

