

WAAS CH 40405 W09A	APP CRS 093°	Rwy Ldg 4801 TDZE 3 Apt Elev 3
--	------------------------	---

RNAV (GPS) RWY 9

KEY WEST INTL (EYW)

RNP APCH-GPS.

▼


▲

W

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 12°C or above 54°C.
Rwy 9 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using
NQX altimeter setting. When local altimeter setting not received, use NQX altimeter setting.

MISSED APPROACH:
Climb to 2000 direct
BURPY and hold.

ATIS 119.675	NAVY KEY WEST APP CON ★ 124.025 313.7	KEY WEST TOWER ★ 118.2 (CTAF) 0 257.8	GND CON 121.9	UNICOM 122.95
------------------------	---	---	-------------------------	-------------------------

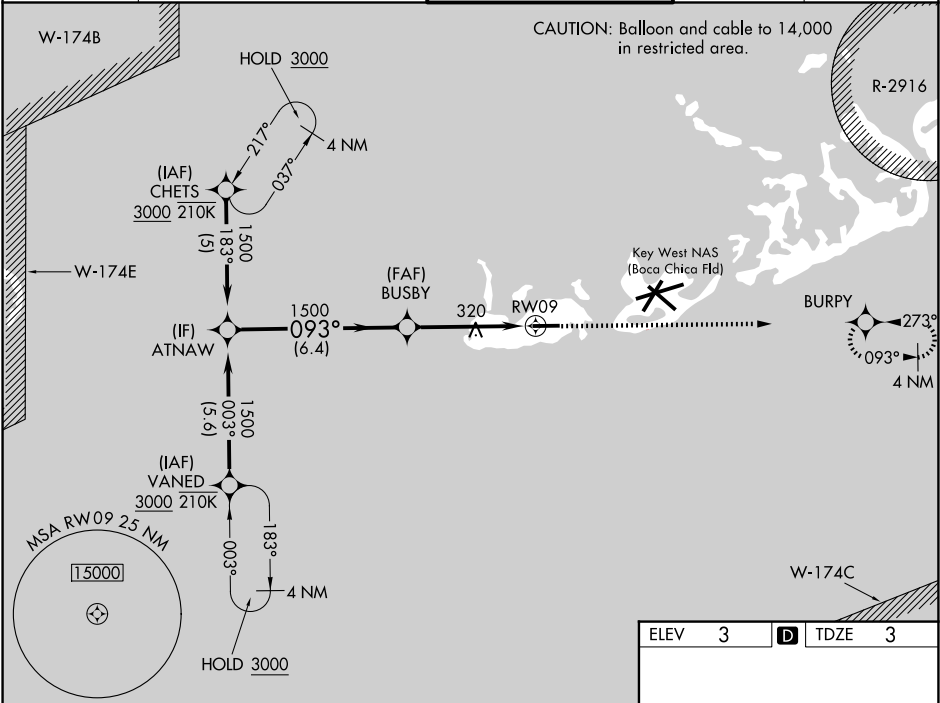

	ATNAW	BUSBY	1500	1.7 NM to RW09	RW09	2000	BURPY
	1500	1500	1500	1500	1500	2000	BURPY
GP 3.00°	TCH 35						
CATEGORY	A	B	C	D			
LPV DA	253-1	250 (300-1)					
LNAV/VNAV DA	425-1¼	422 (500-1¼)					
LNAV MDA	580-1	577 (600-1)	580-1½	577 (600-1½)			
CIRCLING	580-1	577 (600-1)	620-1¾ 617 (700-1¾)	620-2 617 (700-2)			

ELEV 3

TDZE 3

093°

5076 X 100

TWR

MIRL Rwy 9-27
REIL Rws 9 and 27