

WAAS
CH **66099**
W31A

APP CRS
312°

Rwy Ldg
TDZE **1679**
Apt Elev **1716**

RNAV (GPS) RWY 31

MINOT INTL (MOT)

RNP APCH.

V

A

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS increase LNAV/VNAV visibility to RVR 4500.



MALSR

AS

5

MISSED APPROACH: Climb to 4500 direct DOYAB and hold.

ASOS 118.725	MINOT APP CON ★ 119.6 363.8	MAGIC CITY TOWER ★ 118.2(CTAF) 251.125	GND CON 121.9	UNICOM 122.95
------------------------	---------------------------------------	--	-------------------------	-------------------------

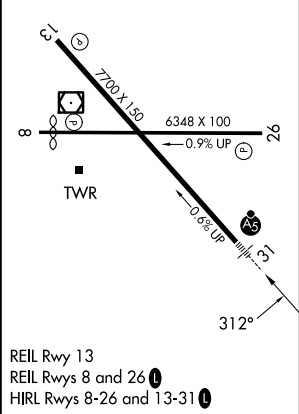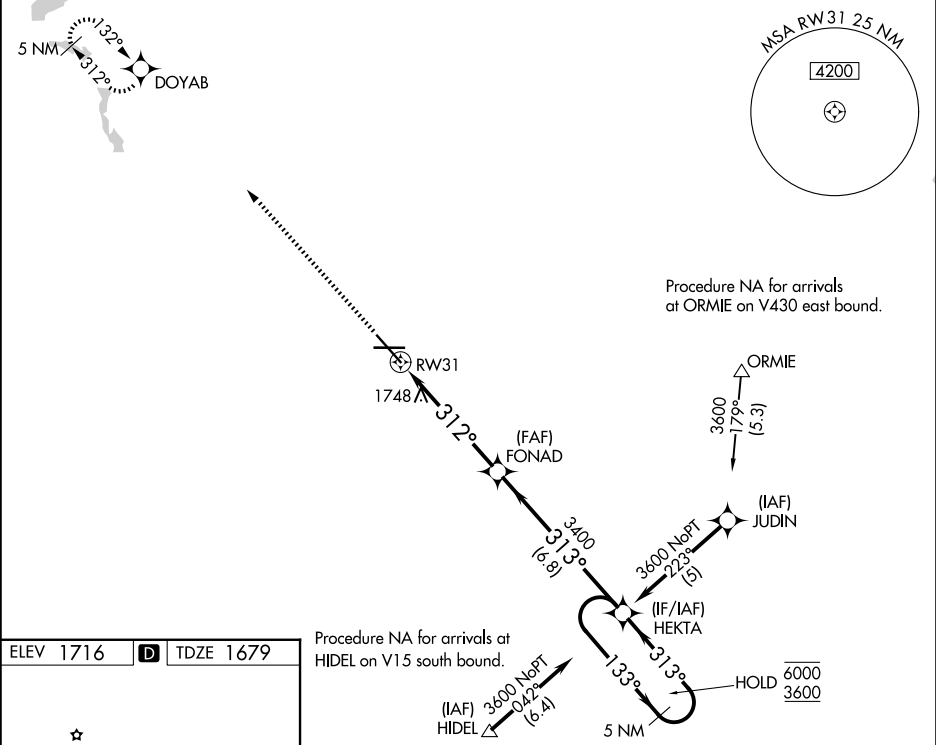

4500 ↑	DOYAB ✦	HEKTA		5 NM Holding Pattern
*LNAV only	*0.9 NM to RW31	FONAD	133° → 6000 ← 313° 3600	GP 3.00° TCH 49
0.9 NM		4.3 NM	6.8 NM	
CATEGORY	A	B	C	D
LPV DA	1929/24 250 (300-½)			
LNAV/VNAV DA	1966/24 287 (300-½)			1966/40 287 (300-¾)
LNAV MDA	2000/24	321 (300-½)	2000/26 321 (300-½)	2000/50 321 (300-1)
CIRCLING	2200-1 484 (500-1)	2240-1 524 (600-1)	2800-3 1084 (1100-3)	