
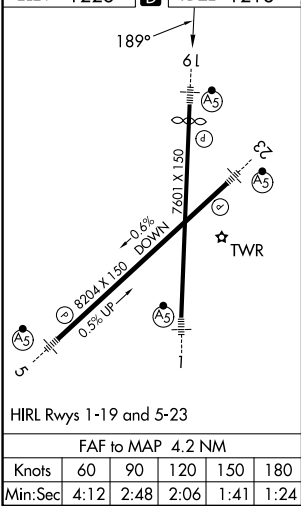


LOC I-RGO	APP CRS	Rwy Ldg	7000
109.5	189°	TDZE	1218
		Apt Elev	1226

ILS or LOC RWY 19
AKRON-CANTON RGNL (CAK)

▼ ** RVR 1800 authorized with the use of FD or AP or HUD to DA. For inoperative ALS, increase CAT C/D visibility to RVR 6000. ZEVLO fix minimums: For inoperative ALS, increase Cat C/D visibility to RVR 5500.	MALSR 	MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct BSV VOR/DME and hold.
--	--	--

ATIS 121.05	CLEVELAND APP CON★ 125.5 269.25	AKRON-CANTON TOWER 134.75 279.575	GND CON 121.7 348.6
----------------	------------------------------------	--------------------------------------	------------------------

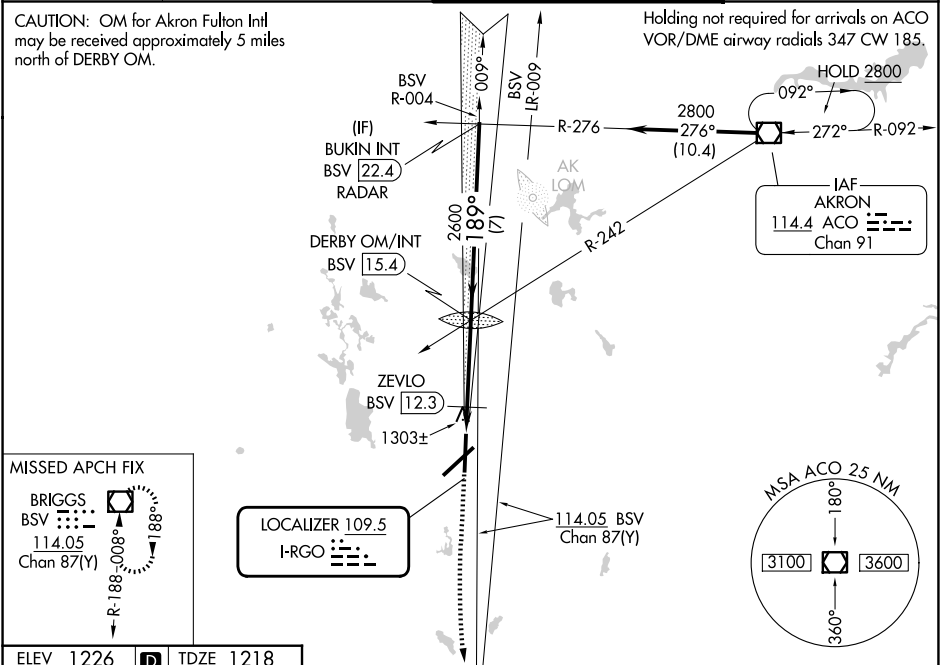

	1700	3000	BSV	DERBY OM/INT BSV [15.4]	BUKIN INT BSV [22.4] RADAR
*LOC only	ZEVLO BSV [12.3]	2597	189°	2800	Procedure Turn NA
	BSV [11.1]	*2600	2700	GS 3.00°	TCH 53
	1.1	3.1 NM	7 NM		
CATEGORY	A	B	C	D	
S-ILS 19	**1418/24 200 (200-½)				
S-LOC 19	1620/24	402 (400-½)	1620/40	402 (400-¾)	
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)	
ZEVLO FIX MINIMUMS					
S-LOC 19	1580/24	362 (400-½)	1580/40 362 (400-¾)		
CIRCLING	1760-1	534 (600-1)	1780-1½ 554 (600-1½)	1800-2 574 (600-2)	

EC-2, 09 JUL 2026 to 06 AUG 2026

EC-2, 09 JUL 2026 to 06 AUG 2026