

WAAS CH 58020 W19A	APP CRS 189°	Rwy Ldg 7000 TDZE 1218 Apt Elev 1226
--	------------------------	---

RNAV (GPS) RWY 19

AKRON-CANTON RGNL (CAK)

T

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA.
 ** RVR 1800 authorized with use of FD or AP or HUD to DA.




MALS




MISSED APPROACH: Climb to 3000
direct HOMEV and on track 184° to
BSV VOR/DME and hold.

ATIS 121.05	CLEVELAND APP CON★ 125.5 269.25	AKRON-CANTON TOWER 134.75 279.575	GND CON 121.7 348.6
----------------	------------------------------------	--------------------------------------	------------------------

Holding not required for arrivals on
ACO VOR/DME airway radials
347 CW 185.

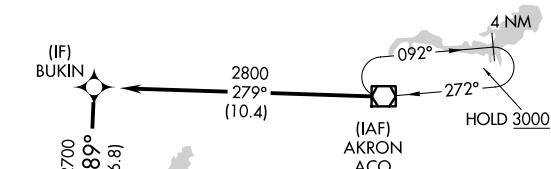

ELEV 1226	D	TDZE 1218
-----------	----------	-----------

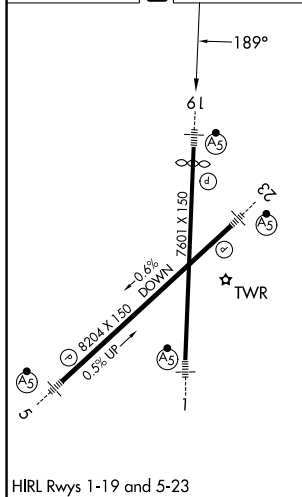

Procedure Turn NA

GP 3.00° TCH 53

* LNAV only

* 1.4 NM to RW19

RW19

OXESE 2700

BUKN 2800

189°

2700

1.4 3 NM 6.8 NM

CATEGORY	A	B	C	D
LPV DA**	1418/24		200 (200-½)	
LNAV/VNAV DA	1753-1½		535 (600-1½)	
LNAV MDA	1700/24 482 (500-½)		1700/40 482 (500-¾)	1700/50 482 (500-1)
CIRCLING	1760-1 534 (600-1)		1780-1½ 554 (600-1½)	1800-2 574 (600-2)

AKRON, OHIO
Orig-B 12AUG21

40°55'N-81°27'W

AKRON-CANTON RGNL (CAK)
RNAV (GPS) RWY 19