

LOC I-PKB 110.7	APP CRS 027°	Rwy Ldg TDZE Apt Elev	6780 830 859
---------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 3
MID-OHIO VALLEY RGNL (PKB)

NA Circling Rwy 10, 28 NA at night. Rwy 3 helicopter visibility reduction below RVR 4000 NA. When local altimeter setting not received, use Athens/Albany altimeter setting: increase DA to 1301 feet and visibility all Cats ¼ SM; increase all MDAs 100 feet and visibility Cats C and D ½ SM. For inop ALS, increase S-LOC 3 Cat A/B and S-LOC 3 HADUP fix minimums (DME required) Cat A/B visibility to RVR 5500. For inop ALS when using Athens/Albany altimeter setting, increase S-ILS 3 all Cats visibility to 1½ SM and S-LOC 3 all Cats and S-LOC 3 HADUP fix minimums (DME required) Cat A/B visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 1400 then climbing right turn to 2700 direct JPU VOR/DME and hold.

ATIS 124.35	INDIANAPOLIS CENTER 125.55 317.475	PARKERSBURG TOWER ★ 123.7 (CTAF) 257.8	GND CON 126.45	UNICOM 122.95
-----------------------	--	--	--------------------------	-------------------------

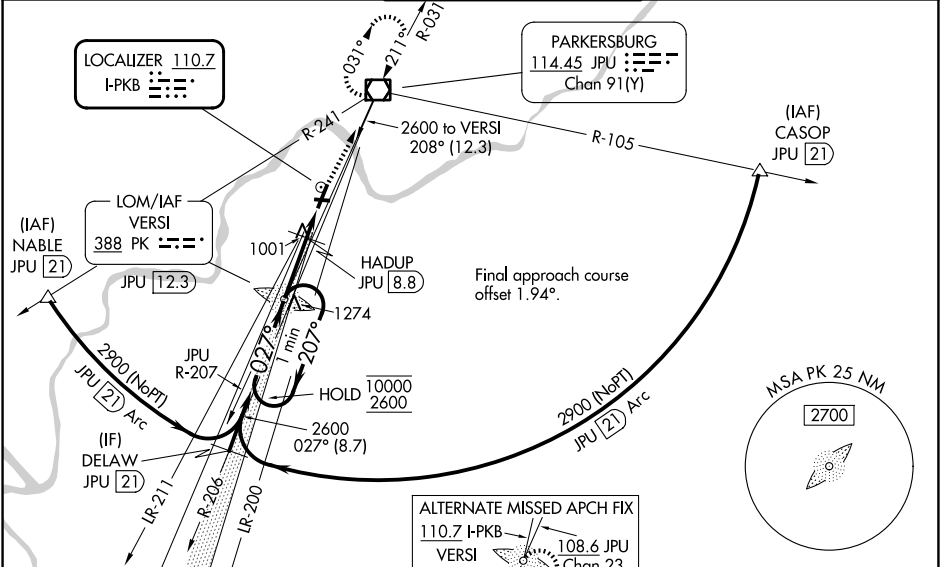

ELEV 859 **D** TDZE 830

HIRL Rwys 3-21 and 10-28 **1**

REIL Rwy 10, 21 **1**

REIL Rwy 28

ALTERNATE MISSED APCH FIX

110.7 I-PKB

VERSI

PK 388

JPU 12.3

108.6 JPU

Chan 23

One Minute Holding Pattern				VERSI LOM JPU 12.3	2592	HADUP JPU 8.8	JPU 7	JPU
10000 2600				207°	027°	2600	1380	1400 2700
GS 3.00° TCH 49				3.5 NM	1.8			
CATEGORY	A	B	C	D				
S-ILS 3	1201/40 371 (400-¾)							
S-LOC 3	1380/40	550 (600-¾)	1380/60	550 (600-1¼)				
CIRCLING	1380-1	521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)				
HADUP FIX MINIMUMS (DME REQUIRED)								
S-LOC 3	1260/40 430 (500-¾)							
CIRCLING	1320-1 461 (500-1)	1380-1 521 (600-1)	1640-2¼ 781 (800-2¼)	1640-2½ 781 (800-2½)				
					FAF to MAP 5.3 NM			
					Knots	60	90	120 150 180
					Min:Sec	5:18	3:32	2:39 2:07 1:46

NE-4, 09 JUL 2026 to 06 AUG 2026

NE-4, 09 JUL 2026 to 06 AUG 2026