

WAAS CH 61115 W28A	APP CRS 284°	Rwy Ldg TDZE 5459 Apt Elev 5516
--	------------------------	---

RNAV (GPS) RWY 28

CENTRAL WYOMING RGNL (RIW)

RNP APCH - GPS.


⚠

Baro-VNAV and VDP NA when using Lander altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27°C or above 48°C. For inop MALSR, increase LNAV/VNAV all Cats visibility to ¾ mile and LNAV Cat C and D visibility to 1 mile. When local altimeter setting not received, use Lander altimeter setting: increase LPV DA to 5713 feet, LNAV/VNAV DA to 5763 and all visibilities ½ mile; increase all MDA 60 feet and LNAV Cat C and D visibility ½ mile. For inop MALSR, when using Lander altimeter setting, increase LPV all Cats visibility to ¾ mile and LNAV/VNAV all Cats visibility to 1 mile.

MALSR

MISSED APPROACH:
Climb to 7900 direct
TIDHU and hold.

ASOS 121.425	SALT LAKE CENTER 133.25 285.6	UNICOM 122.8 (CTAF)
------------------------	---	-------------------------------

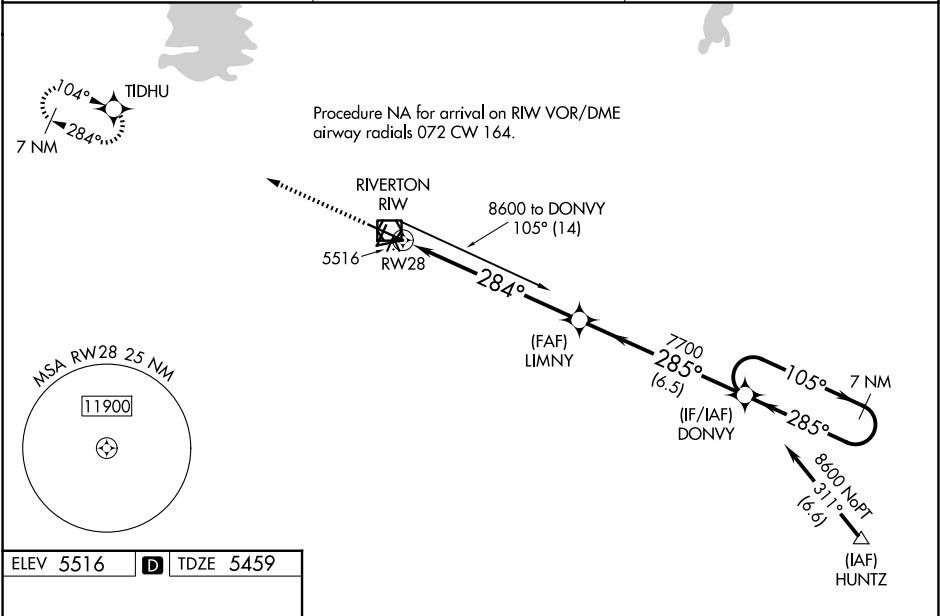

ELEV 5516		TDZE 5459
-----------	--	-----------

Visual approach diagram: 1.7% DOWN, 0.4% UP, 0.7% UP, 284°.

7900

TIDHU

LIMNY

7700

DONVY

8600

1 NM to RW28

1 NM

5.9 NM

6.5 NM

CATEGORY	A	B	C	D
LPV DA	5659-½		200 (200-½)	
LNAV/VNAV DA	5709-½		250 (200-½)	
LNAV MDA	5820-½ 361 (400-½)		5820-⅝ 361 (400-⅝)	
CIRCLING	6000-1 484 (500-1)		6000-1½ 484 (500-1½) 6120-2 604 (700-2)	

REIL Rwy 1, 10, and 19

MIRL Rwy 1-19

HIRL Rwy 10-28

GP 3.00°

TCH 50