

|                                        |                        |                                                  |
|----------------------------------------|------------------------|--------------------------------------------------|
| WAAS<br>CH <b>77617</b><br><b>W09A</b> | APP CRS<br><b>090°</b> | Rwy Ldg<br>TDZE <b>96</b><br>Apt Elev <b>112</b> |
|----------------------------------------|------------------------|--------------------------------------------------|

RNAV (GPS) RWY 9

ESLR RGNL (E5T')

RNP APCH-GPS.


▼

⚠


Circling Rwy 14, 32 NA at night. Baro-VNAV and VDP NA when using Alexandria Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -6°C or above 54°C. When local altimeter setting not received, use Alexandria Intl altimeter setting: increase LPV DA to 331 feet; increase LNAV/VNAV DA to 644 feet and all visibility ¼ SM; increase all MDAs 40 feet and Circling visibility Cat D ¼.

MISSED APPROACH: Climb to 3000 direct ILULE and hold.

|                            |                                    |                                 |
|----------------------------|------------------------------------|---------------------------------|
| ESF ASOS<br><b>119.425</b> | MAKS APP CON<br><b>125.4 254.8</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|----------------------------|------------------------------------|---------------------------------|

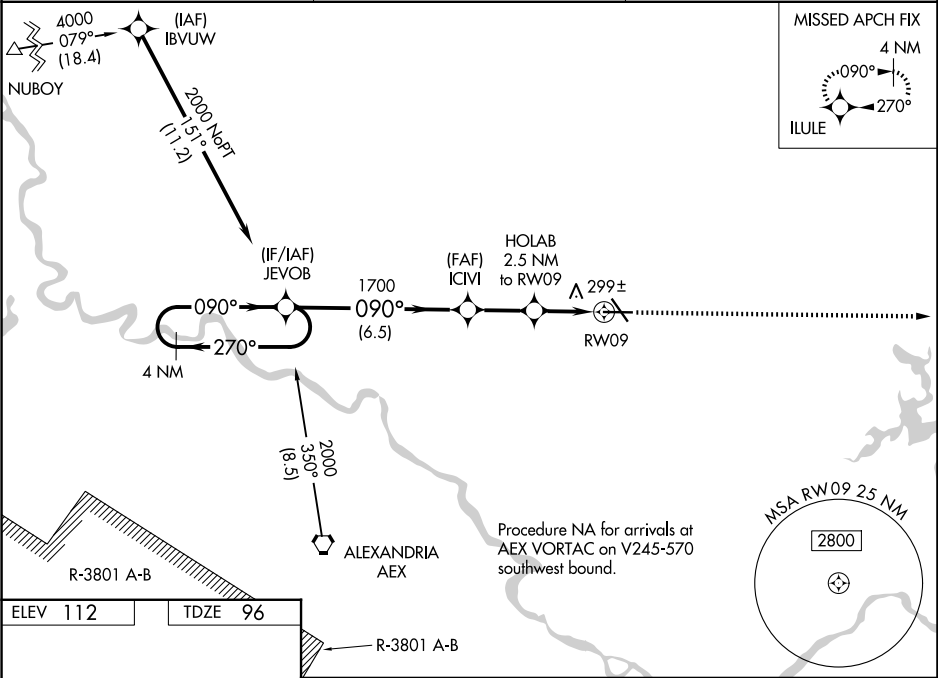

|                 |                |
|-----------------|----------------|
| ELEV <b>112</b> | TDZE <b>96</b> |
|-----------------|----------------|



|                      |       |        |             |        |              |                      |              |            |  |
|----------------------|-------|--------|-------------|--------|--------------|----------------------|--------------|------------|--|
| 4 NM Holding Pattern |       | JEVOB  |             | ICVI   |              | HOLAB 2.5 NM to RW09 |              | 3000 ILULE |  |
| 2000                 |       | 270°   |             | 090°   |              | 1700                 |              | *940       |  |
| GP 3.00° TCH 53      |       | 6.5 NM |             | 2.4 NM |              | 1.2 NM               |              | 1.3 NM     |  |
| CATEGORY             | A     |        | B           |        | C            |                      | D            |            |  |
| LPV DA               |       |        | 296-3¼      |        | 200 (200-¾)  |                      |              |            |  |
| LNAV/VNAV DA         |       |        | 609-1¾      |        | 513 (500-1¾) |                      |              |            |  |
| LNAV MDA             | 560-1 |        | 464 (500-1) |        | 560-1¾       |                      | 464 (500-1¾) |            |  |
| CIRCLING             | 600-1 |        | 488 (500-1) |        | 740-1¾       |                      | 760-2        |            |  |
|                      |       |        |             |        | 628 (700-1¾) |                      | 648 (700-2)  |            |  |