


APP CRS 011°	Rwy Ldg 11500 TDZE 286 Apt Elev 312	RNAV (RNP) Z RWY 1C WASHINGTON DULLES INTL (IAD)	
RNP AR APCH - GPS. Authorization required.		MALSR 	MISSED APPROACH: Climb to 4000 direct CHDMN and hold, continue climb-in-hold to 4000.
Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. For inop ALPS, increase RNP 0.11 all Cats visibility to RVR 4000.			
D-ATIS 134.85	POTOMAC APP CON 120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	DULLES TOWER 120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	GND CON 121.9 317.8 (EAST) 121.625 348.6 (WEST)

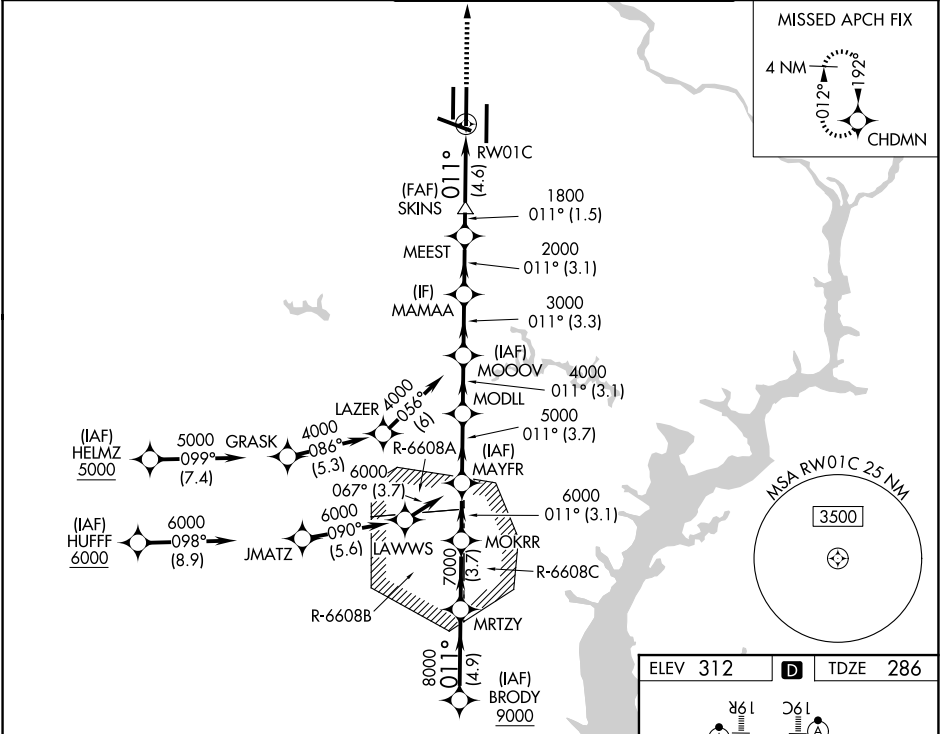

BRODY 9000 011° 8000 GP 3.00° TCH 54										MRTZY 7000 MOKRR 6000 MAYFR 5000 MODLL 4000 MOOOV 3000 MAMAA 2000 MEEST 1800 SKINS 1800 RWY1C										VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 70). 4000 CHDMN																																																																					
← 4.9 NM →										→ 3.7 NM →										→ 3.1 NM →										→ 3.7 NM →										→ 3.1 NM →										→ 3.3 NM →										→ 3.1 NM →										→ 1.5 NM →										→ 4.6 NM →									
CATEGORY										A										B										C										D																																																	
RNP 0.11 DA										540/24										254 (300-½)																																																																					
RNP 0.30 DA										730/45										444 (500-¾)																																																																					
AUTHORIZATION REQUIRED																																																																																									

TDZL/RCLS Rwys 1C, 1L, 1R, 12, 19C and 19R

REIL Rwy 30

HIRL all rwys