


WAAS CH 61300 W30A	APP CRS 296°	Rwy Idg TDZE 619 Apt Elev 632	5500
--	------------------------	---	-------------


RNAV (GPS) RWY 30

BUTLER COUNTY RGNL/HOGAN FLD (HAO)

RNP APCH - GPS.				MALS 	MISSED APPROACH: Climb to 2700 direct MONTR and hold.
	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Inop table does not apply to LPV.				
					
ASOS 121.425	CINCINNATI APP CON 121.0 254.25		CLNC DEL 126.25	UNICOM 123.05 (CTAF) 0	

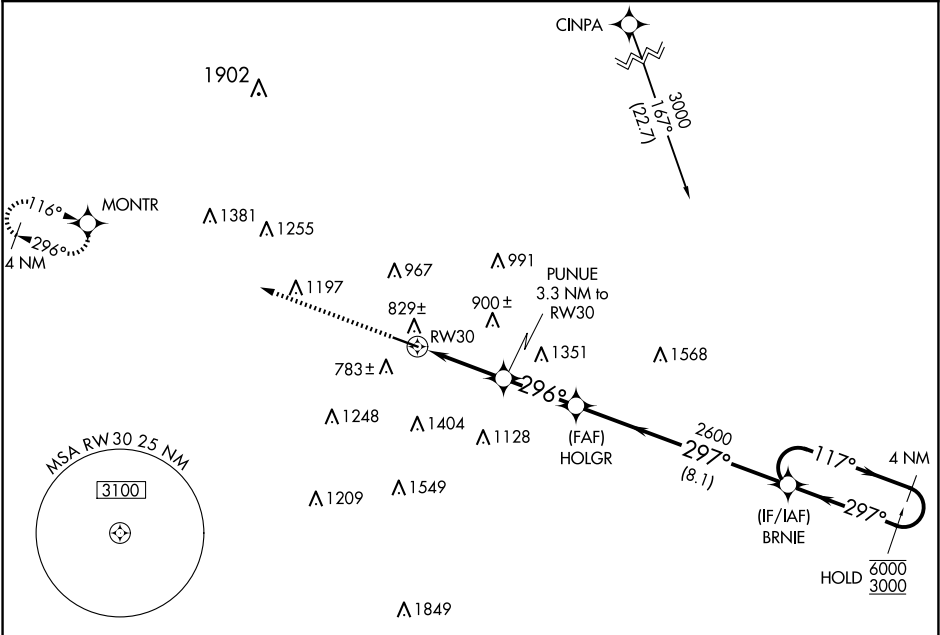

ELEV 632	TDZE 619
-----------------	-----------------

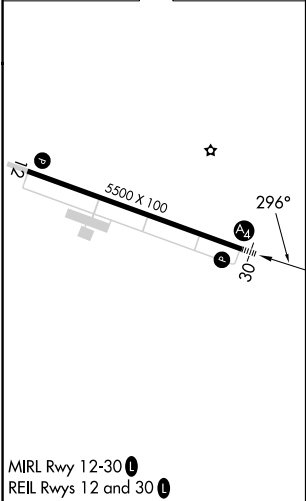

2700		MONTR		4 NM		Holding Pattern	
							
							
RW30		PUNUE 1.3 NM to RW30 3.3 NM to RW30		HOLGR 2600		BRNIE 117° 297° 6000 3000	
1.3		2 NM		2.8 NM		8.1 NM	
296°		1700		2600		GP 3.00° TCH 46	
CATEGORY	A		B		C		D
LPV DA			819-3/4		200 (200-3/4)		
LNAV/VNAV DA			1080-1 1/8		461 (500-1 1/8)		
LNAV MDA	1080-3/4		461 (500-3/4)		1080-1 1/8		461 (500-1 1/8)
CIRCLING	1280-1		648 (700-1)		1300-1 3/4 668 (700-1 3/4)		1760-3 1128 (1200-3)

EC-2, 09 JUL 2026 to 06 AUG 2026

EC-2, 09 JUL 2026 to 06 AUG 2026