

VORTAC EUF 109.2 Chan 29	APP CRS 187°	Rwy Ldg 5000 TDZE 285 Apt Elev 285
--	------------------------	---


VOR RWY 18
WEEDON FLD (EUF)

T
A NA


When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-18 visibility Cats C and D $\frac{1}{2}$ SM and Circling Cats C and D $\frac{1}{4}$ SM. Increase AFENY fix minimums S-18 visibility Cats C and D $\frac{1}{8}$ SM and Circling visibility Cats C and D $\frac{1}{4}$ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

ASOS 128.325	ATLANTA APP CON ★ 125.5 323.1	CLNC DEL 134.25 339.8	UNICOM 122.8 (CTAF) ①
------------------------	---	---------------------------------	---------------------------------

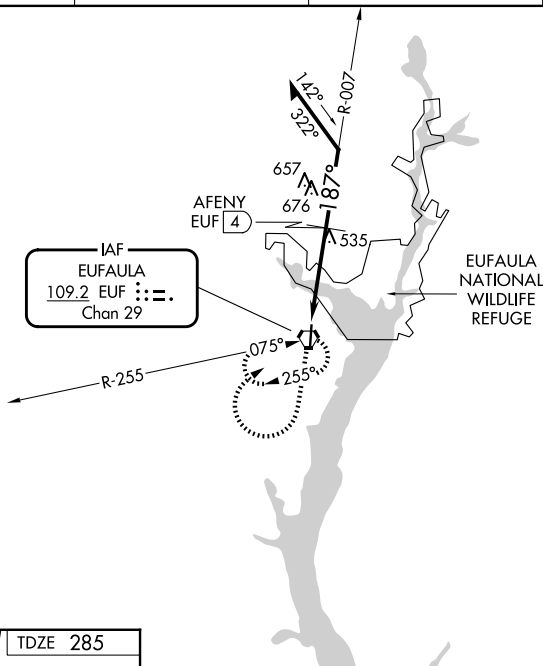

ELEV 285	TDZE 285
----------	----------

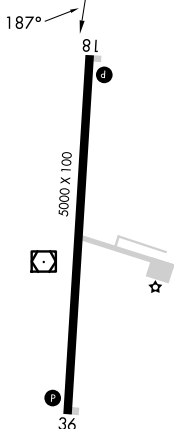

The diagram shows the AFENY VORTAC station. A vertical line represents the station's location. A horizontal line extends to the left, with a dashed arrow indicating a 1000-foot distance. A horizontal line extends to the right, with a dashed arrow indicating a 4 NM distance. A line extends from the station at a 007° bearing, with a note "Remain within 10 NM". A line extends from the station at a 187° bearing, with a note "2000". A line extends from the station at a 1040* bearing, with a note "1040*". A line extends from the station at a 1040-1 bearing, with a note "1040-1". A line extends from the station at a 1040-1 1/4 bearing, with a note "1040-1 1/4". A line extends from the station at a 1060-2 1/4 bearing, with a note "1060-2 1/4". A line extends from the station at a 1060-2 1/2 bearing, with a note "1060-2 1/2".

CATEGORY	A	B	C	D
S-18	1040-1 755 (800-1)	1040-1 1/4 755 (800-1 1/4)	1040-2	755 (800-2)
CIRCLING	1040-1 755 (800-1)	1040-1 1/4 755 (800-1 1/4)	1060-2 1/4 775 (800-2 1/4)	1060-2 1/2 775 (800-2 1/2)

AFENY FIX MINIMUMS (DME REQUIRED)

S-18	900-1	615 (700-1)	900-1 3/4	615 (700-1 3/4)
CIRCLING	920-1	635 (700-1)	1060-2 1/4 775 (800-2 1/4)	1060-2 1/2 775 (800-2 1/2)