

GTLKE FIVE DEPARTURE (RNAV)

RNAV 1 - DME/DME/IRU or GPS.
RADAR required.

CLEVELAND DEP CON
125.35 346.325
ATIS
125.25
CLINC DEL
339.8
121.9 (when twr closed)
GND CON
121.9 339.8
LAKEFRONT TOWER★
124.3 (CTAF) 339.8

NOTE: Rwy 6R/24L: Takeoff minimums NA when control tower closed.

TAKEOFF MINIMUMS:



Rwys 6L, 24R: Standard with minimum climb of 500' per NM to 1100

Rwys 6R: Standard with minimum climb

of 500' per NM to 1100. NA when control tower closed.

Rwy 24L: 400-1³/₈ or standard with minimum

climb of 757' per NM to 1000. NA when control tower closed.

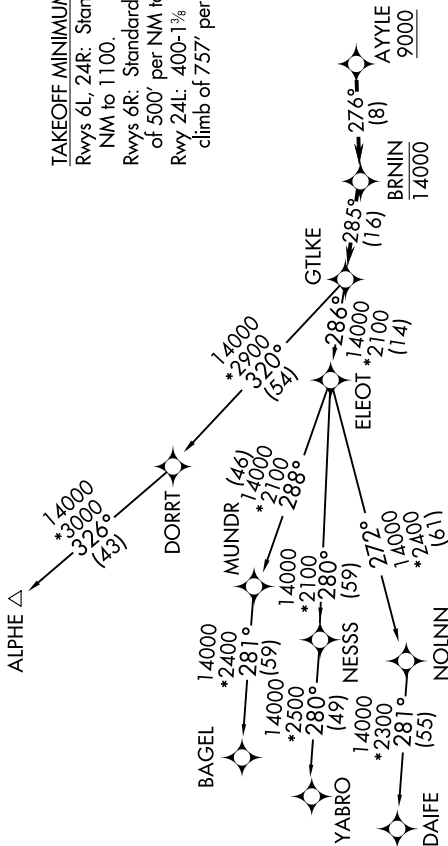

A diagram of a circular optical element, possibly a lens or filter. It features a central crosshair symbol. A rectangular label with the number '3100' is positioned near the center. The outer edge of the circle is labeled 'SWA BKL 25 NM'.

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)

EC-2, 09 JUL 2026 to 06 AUG 2026

GTLKE FIVE DEPARTURE (RNAV)
(GTLKE5.GTLKE) 27NOV25

CLEVELAND, OHIO
BURKE LAKEFRONT (BKL)