



CLEVELAND DEP CON
125.35 346.325
ATIS 125.25
CLNC DEL
339.8
121.9 (when tower closed)
GND CON 121.9 339.8
LAKEFRONT TOWER★
124.3 (CTAF) 339.8

RNAV-1 GPS.

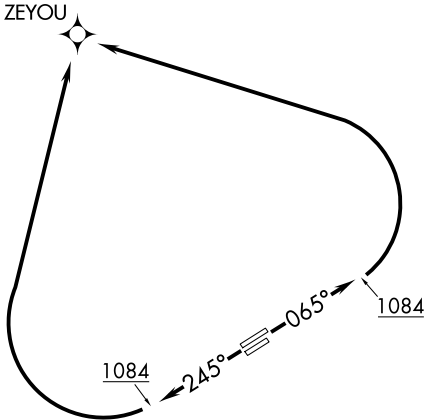

TAKEOFF MINIMUMS:
Rwy 6L: 300-1¼ with minimum climb of 220' per NM to 900.
Rwy 6R: 300-1½ with minimum climb of 290' per NM to 1000.
Rwy 24L: 400-1⅜ or Standard with minimum climb of 757' per NM to 1000.
Rwy 24R: 300-1 or Standard with minimum climb of 490' per NM to 900.



NOTE: Chart not to scale. (CONTINUED ON FOLLOWING PAGE)

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 6L/R: Climb on heading 065° to 1084, then climbing left turn direct ZEYOU, thence...
TAKEOFF RUNWAYS 24L/R: Climb on heading 245° to 1084, then climbing right turn direct ZEYOU, thence...

...cross ZEYOU at or above MEA/MCA for route of flight.