

WAAS CH 58204 W17A	APP CRS 168°	Rwy Ldg 6501 TDZE 17 Apt Elev 17
--	------------------------	---

RNAV (GPS) RWY 17

TRENT LOTT INTL (PQL)


RNP APCH - GPS.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.
⚠ When local altimeter setting not received, use Mobile Rgnl altimeter setting; increase LPV DA to 292 feet and LNAV/VNAV DA to 357 feet; increase LNAV/VNAV all visibilities $\frac{1}{8}$ SM. Increase all MDA 80 feet and LNAV Cat C/D visibility $\frac{1}{4}$ SM and Circling Cat C/D visibility $\frac{1}{2}$ SM. Baro-VNAV and VDP NA with Mobile Rgnl altimeter setting. For inop ALS when using Mobile Rgnl altimeter setting increase LPV all Cats visibility to $\frac{7}{8}$ SM.

MALSR

MISSED APPROACH:
Climb to 800 then
climbing left turn to
1800 direct BEZJU
and hold.

ATIS 135.175	MOBILE APP CON★ 121.0 307.1	TRENT LOTT TOWER★ 118.575 (CTAF) 0	GND CON 121.725	UNICOM 122.8
------------------------	---------------------------------------	--	---------------------------	------------------------

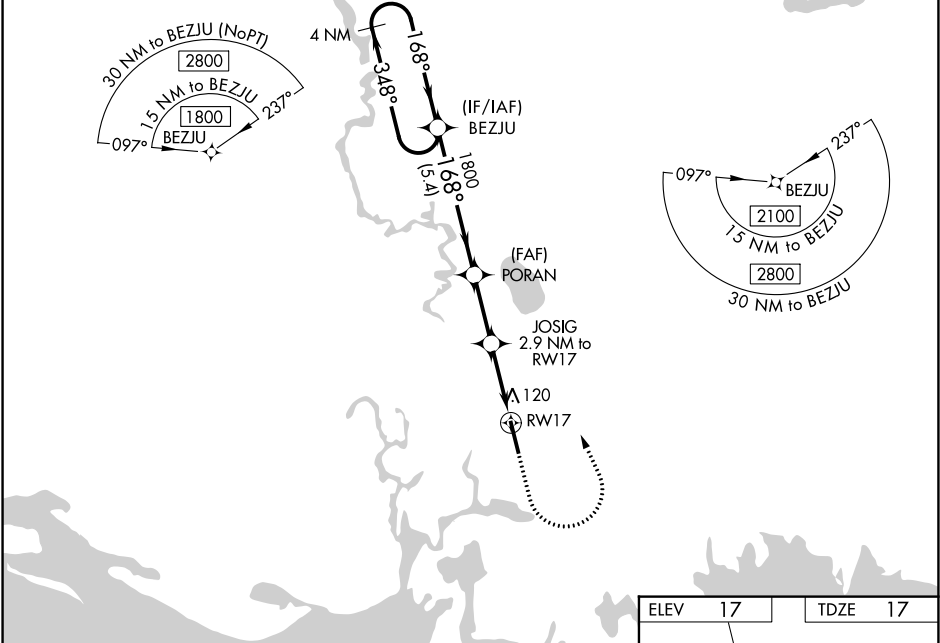

CATEGORY	A	B	C	D	
LPV DA	217- $\frac{1}{2}$		200 (200- $\frac{1}{2}$)		
LNAV/VNAV DA	282- $\frac{1}{2}$		265 (300- $\frac{1}{2}$)		
LNAV MDA	380- $\frac{1}{2}$	363 (400- $\frac{1}{2}$)	380- $\frac{5}{8}$	363 (400- $\frac{5}{8}$)	
CIRCLING	480-1 463 (500-1)	680-1 663 (700-1)	680-1 $\frac{3}{4}$ 663 (700-1 $\frac{3}{4}$)	680-2 663 (700-2)	

