


VORTAC ACT	APP CRS	Rwy Ldg	5501
115.3	185°	TDZE	592
Chan 100		Apt Elev	592


VOR RWY 17

MC GREGOR EXEC (PWG)

DME required.	MISSED APPROACH: Climb to 1000 then climbing right turn to 4000 direct ACT VORTAC and hold, continue climb-in-hold to 4000.
▼ ▲ ASR Circling Rwy 4/22 NA at night. VDP NA when using ACT altimeter setting. When local altimeter setting not recieved, use ACT altimeter setting and increase all MDAs 40 feet and Circling visibility Cat C ¼ SM.	

AWOS-3PT 135.525	WACO APP CON★ 127.65 352.0	UNICOM 123.05 (CTAF) 0
---------------------	-------------------------------	---------------------------

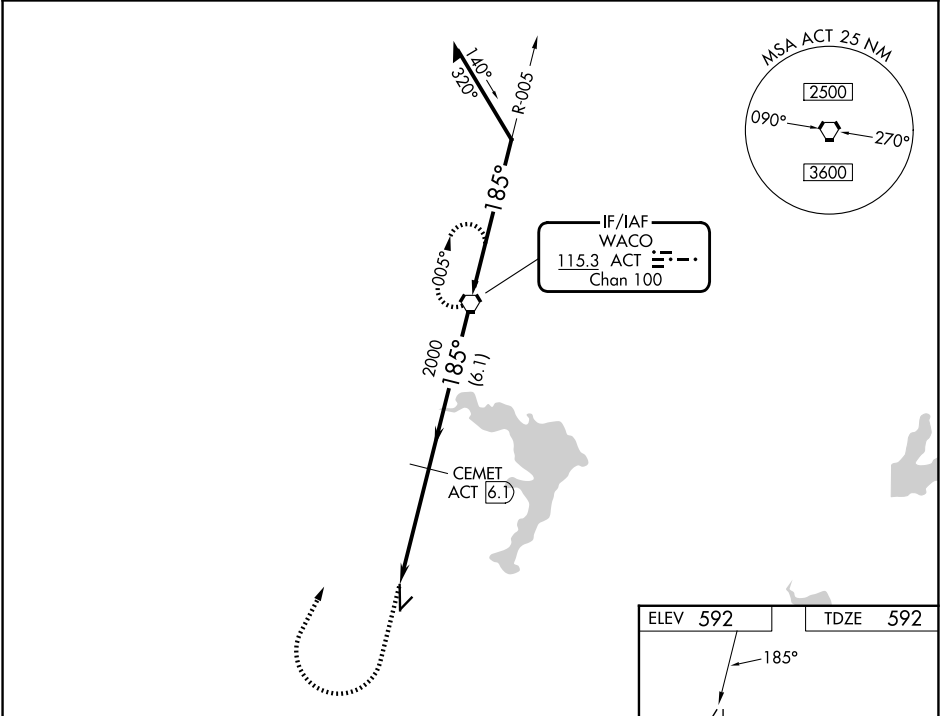

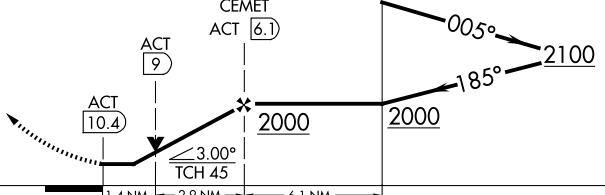1000	4000	ACT	VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 36).			
						
			Remain within 10 NM			
CATEGORY	A		B		C	D
S-17	1060-1 468 (500-1)		1060-1 ³ / ₈ 468 (500-1 ³ / ₈)		NA	
CIRCLING	1060-1 468 (500-1)		1300-2 708 (800-2)		NA	

ELEV 592	TDZE 592
185°	185°
1	2
5501 X 75	3484 X 55
35	35
REIL Rwy 17 0	MIRL Rwy 17-35 0
FAF to MAP 4.3 NM	
Knots	60 90 120 150 180
Min:Sec	4:18 2:52 2:09 1:43 1:26