



WAAS CH 99313 W19A	APP CRS 190°	Rwy Idg 6604 TDZE 91 Apt Elev 91
--	------------------------	---

RNAV (GPS) RWY 19

T Baro-VNAV NA when using Mobile Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F).
A DME/DME RNP-0.3 NA. VDP NA with Mobile Intl altimeter setting. When local altimeter setting not received, use Mobile Intl altimeter setting and increase LPV DA to 383 feet, LNAV/VNAV DA to 555 feet and all MDA 60 feet; increase LNAV and Circling Cats C/D visibility ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct BFM Vortac and hold.

AWOS-3PT 118.425	MOBILE APP CON ★ 118.5 269.3	UNICOM 123.0 (CTAF) ①
----------------------------	--	---------------------------------

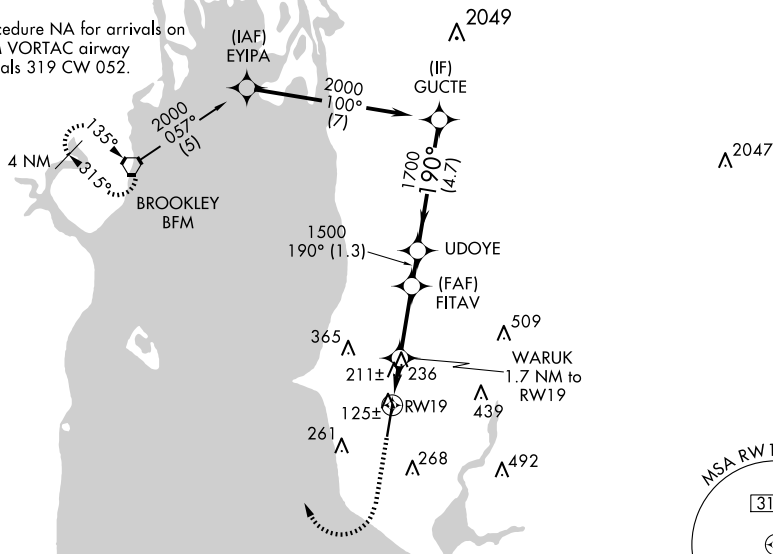

The diagram illustrates the layout of Runway 1-19, which is 6004 X 100 feet long. Key features include:

- Runway Orientation:** Runway 1-19 is oriented at 190°.
- Dimensions:** The runway length is 6004 feet and the width is 100 feet.
- Markings:** The runway is marked with a centerline and edge lines. A star symbol is located near the 1900-foot mark.
- Dimensions:** The runway length is 6004 feet and the width is 100 feet.
- Markings:** The runway is marked with a centerline and edge lines. A star symbol is located near the 1900-foot mark.

