

WAAS CH 99701 W24A	APP CRS 240°	Rwy Ldg TDZE Apt Elev	5500 545 547
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24

MUSCATINE MUNI (MUT)

RNP APCH - GPS.

▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cats C/D visibility to 1½ SM. When local altimeter setting not received, use IOW altimeter setting and increase LPV DA to 883 feet; increase LNAV/VNAV DA to 1024 feet and all visibilities ¼ SM. Increase all MDAs 80 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using IOW altimeter setting.



MALSR

AS

⏏

MISSED APPROACH:
Climb to 3000 direct
IZBUF and hold.

AWOS-3P 120.625	QUAD CITY APP CON ★ 133.275 257.8	CLNC DEL 119.125	UNICOM 122.7 (CTAF) 0
---------------------------	---	----------------------------	---------------------------------

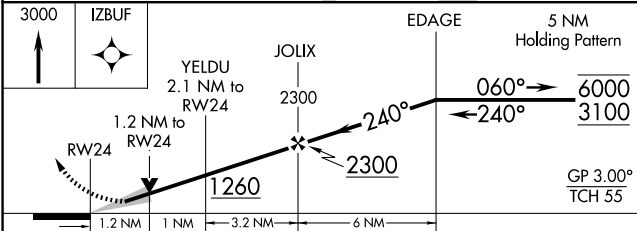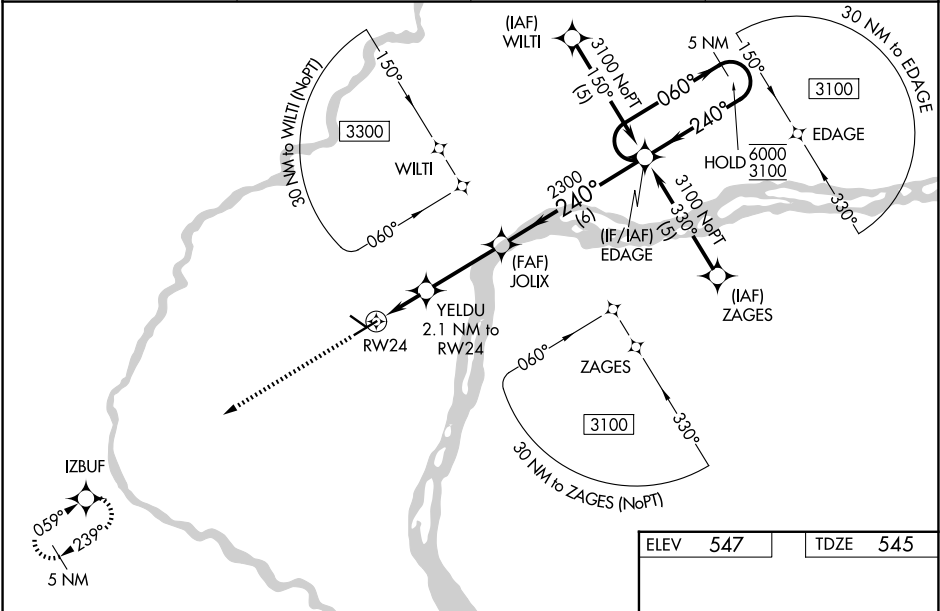

ELEV 547 TDZE 545

12

24

AS

4000 X 75

30

5500 X 100

633

GP 3.00° TCH 55

REIL Rwy 6, 12, and 30 0

MIRL Rwy 6-24 and 12-30 0

CATEGORY	A	B	C	D
LPV DA	812-½ 267 (300-½)			
LNAV/VNAV DA	953-¾ 408 (500-¾)			
LNAV MDA	960-½ 415 (500-½)	960-¾ 415 (500-¾)		
CIRCLING	1080-1 533 (600-1)	1200-1 653 (700-1)	1200-1¾ 653 (700-1¾)	1500-3 953 (1000-3)