

WAAS CH 82215 W28A	APP CRS 277°	Rwy Ldg 4972 TDZE 1134 Apt Elev 1136
--	------------------------	---


RNAV (GPS) RWY 28
WAYNE COUNTY (BJJ)

RNP APCH - GPS.


⚠ Baro-VNAV NA when using CAK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use CAK altimeter setting and increase LPV DA to 1458 feet; increase LNAV/VNAV DA to 1649 feet; increase all MDAs 60 feet; and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 3000 direct
JAVNE and hold.

ASOS 118.075	CLEVELAND APP CON ★ 125.5 371.875	CLNC DEL 121.75	UNICOM 122.975 (CTAF) 0
------------------------	---	---------------------------	-----------------------------------

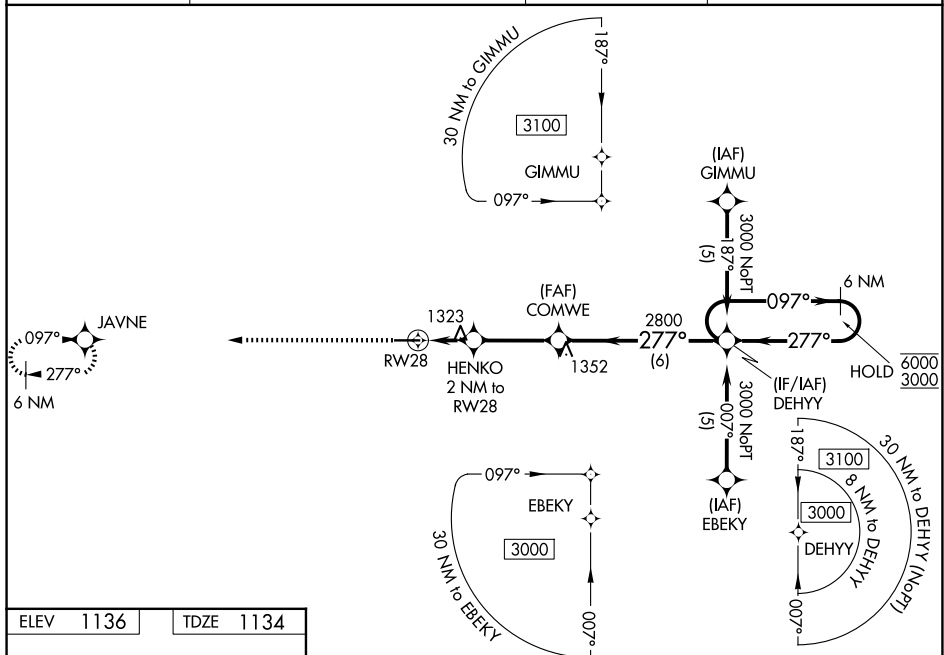

ELEV	1136		TDZE	1134
------	------	--	------	------



REIL Rwy 10 and 28 L

HURL Rwy 10-28 **L**

WOOSTER, OHIO

Orig-D 25DEC25

40°52'N-81°53'W

WAYNE COUNTY (B.J.J)

RNAV (GPS) RWY 28

EC-2, 09 JUL 2026 to 06 AUG 2026