

WAAS CH 56602 W25A	APP CRS 248°	Rwy Ldg 5004 TDZE 949 Apt Elev 949
--	------------------------	---

RNAV (GPS) RWY 25


GREENE COUNTY/LEWIS A JACKSON RGNL (GDK)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.
Rwy 25 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Dayton/Wright Brothers altimeter setting: increase LPV DA to 1249 feet; increase LNAV/VNAV DA to 1252 feet; increase all MDA 40 feet and LNAV visibility Cat C ½ SM.

MISSED APPROACH:
Climb to 2700 direct UYOKO and hold.

AWOS-3 118.525	COLUMBUS APP CON 118.85 269.275	UNICOM 122.725 (CTAF) 0
--------------------------	---	-----------------------------------

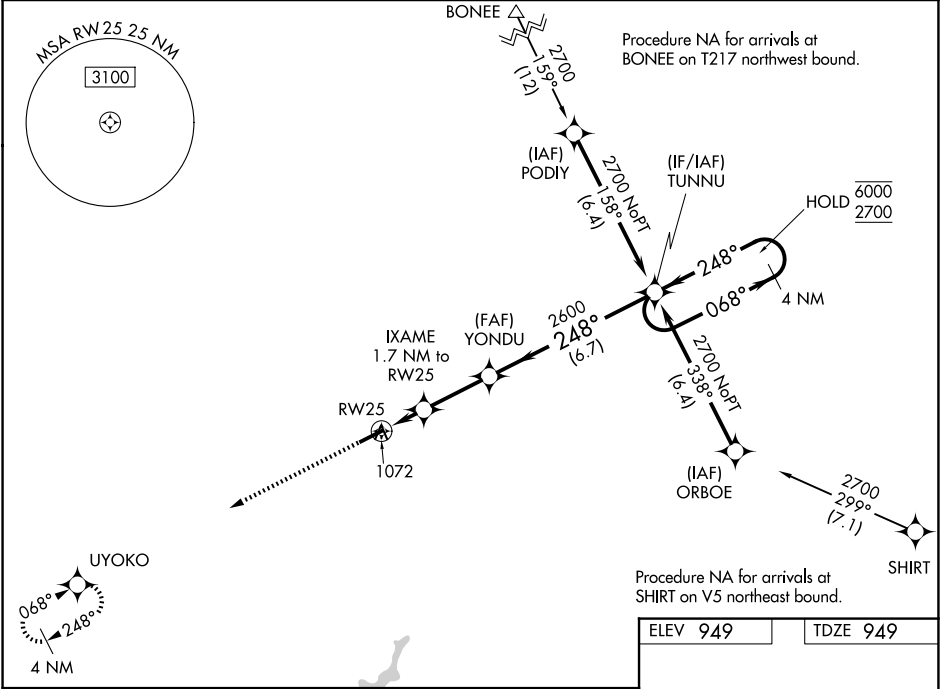

2700 UYOKO

↑

YONDU 2600

TUNNU 2600

IXAME 1.7 NM to RW25

RW25 1620

1 NM 0.7 2.6 NM 6.7 NM

4 NM Holding Pattern

068° 248° 6000 2700

GP 3.50° TCH 40

CATEGORY	A	B	C	D
LPV DA	1219-1	270 (300-1)		NA
LNAV/VNAV DA	1222-1	273 (300-1)		NA
LNAV MDA	1340-1	391 (400-1)	1340-1 3/8 391 (400-1 1/8)	NA
CIRCLING	1480-1	531 (600-1)	1560-1 3/4 611 (700-1 3/4)	NA

ELEV 949 TDZE 949

5004 X 75

0.8% UP

248°

MIRL Rwy 7-25 0
REIL Rwy 7 and 25 0